

# DISSIPATIVE SYSTEMS

**Jan Willems**

`Jan.Willems@esat.kuleuven.be`

`http://www.esat.kuleuven.be/~jwillems`

# LYAPUNOV FUNCTIONS

Consider the classical dynamical system, the **flow**

$$\Sigma : \quad \dot{\mathbf{x}} = f(\mathbf{x})$$

with  $\mathbf{x} \in \mathbb{X} = \mathbb{R}^n$ , the **state**, and  $f : \mathbb{X} \rightarrow \mathbb{X}$ , the **vector-field**.

Denote the set of solutions  $x : \mathbb{R} \rightarrow \mathbb{X}$  by  $\mathfrak{B}$ , the **'behavior'**.

# LYAPUNOV FUNCTIONS

Consider the classical dynamical system, the **flow**

$$\Sigma : \quad \dot{\mathbf{x}} = f(\mathbf{x})$$

with  $\mathbf{x} \in \mathbb{X} = \mathbb{R}^n$ , the **state**, and  $f : \mathbb{X} \rightarrow \mathbb{X}$ , the **vector-field**.  
Denote the set of solutions  $x : \mathbb{R} \rightarrow \mathbb{X}$  by  $\mathfrak{B}$ , the **'behavior'**.

$$V : \mathbb{X} \rightarrow \mathbb{R}$$


is said to be a **Lyapunov function** for  $\Sigma$  if along  $x \in \mathfrak{B}$

$$\frac{d}{dt} V(x) \leq 0$$

Equivalently, if

$$\dot{V}^\Sigma := \nabla V \cdot f \leq 0.$$

# LYAPUNOV FUNCTIONS

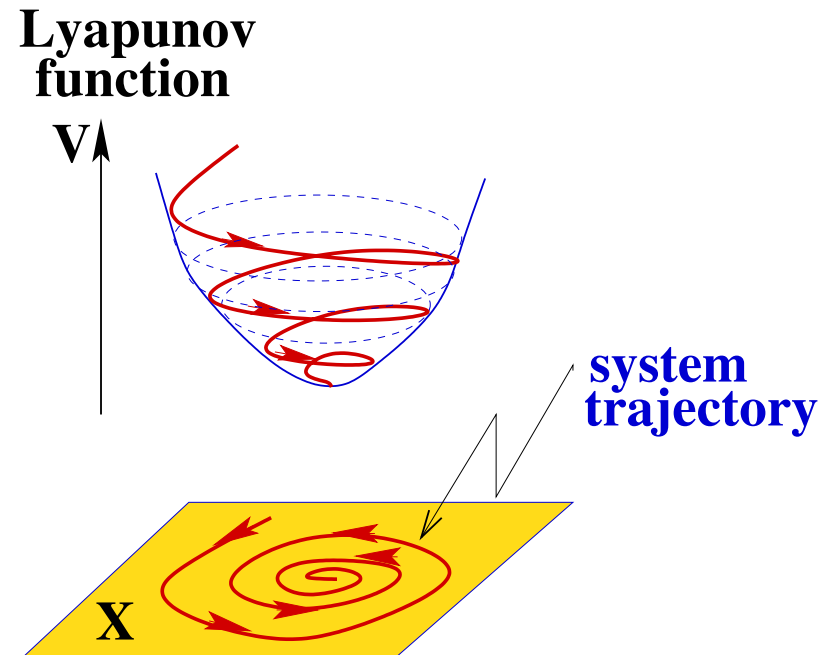

Let  $x^* = \arg \min \{V(x) \mid x \in \mathbb{X}\}$

Typical Lyapunov 'theorem'  $\cong$  'global stability':

$$V(x) > 0 \text{ and } \dot{V}^\Sigma(x) < 0 \text{ for } x^* \neq x \in \mathbb{X}$$

$$\Rightarrow \forall x \in \mathfrak{B}, \text{ there holds } x(t) \rightarrow x^* \text{ for } t \rightarrow \infty$$

# LYAPUNOV FUNCTIONS

Refinements: LaSalle's invariance principle.

Converse: Kurzweil's thm.

LQ theory  $\rightsquigarrow$   $A^T X + X A = Y$

'(matrix) Lyapunov equation'.

A linear system  $\dot{x} = Ax$  is stable  $\iff A$  is *Hurwitz*)  $\iff$   
the Lyapunov  $\iff$  it has a quadratic positive definite Lyapunov  
function: sol'n  $X = X^T > 0$ ,  $Y = Y^T < 0$  to Lyapunov eq'n.

Set of  $X$ 's form a convex cone.

Basis for most stability results in diff. eq'ns, (adaptive) control,  
system identification, etc.

# LYAPUNOV FUNCTIONS

**Lyapunov functions** play a remarkably central role in the field.




**Aleksandr Mikhailovich Lyapunov (1857-1918)**

**Introduced Lyapunov's 'second method' in his Ph.D. thesis (1899).**


# OPEN SYSTEMS

**'Open' systems** are a much more appropriate starting point for the study of dynamics. For example,

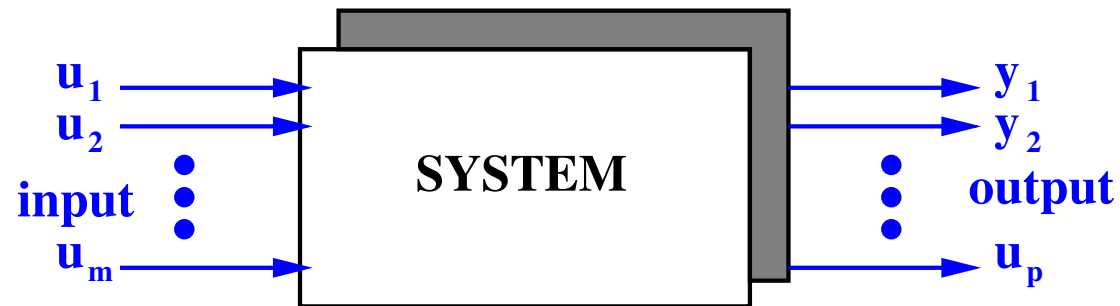

# OPEN SYSTEMS

**‘Open’ systems** are a much more appropriate starting point for the study of dynamics. For example,

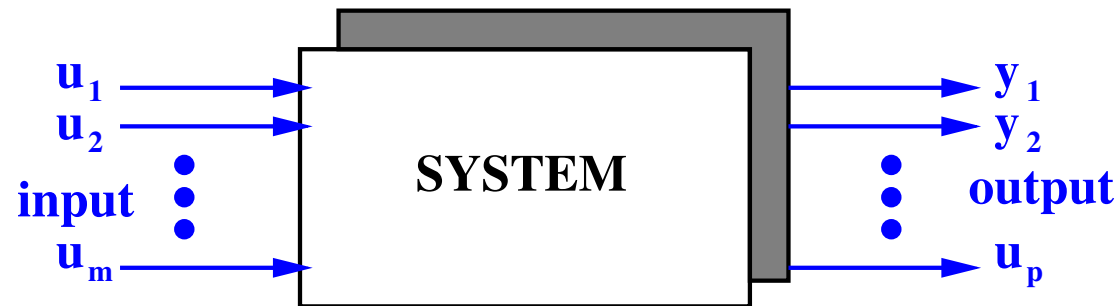

What is the analogue of a Lyapunov function for ‘open’ systems?




Dissipative systems.



# THEME

A **dissipative** system absorbs **supply**.

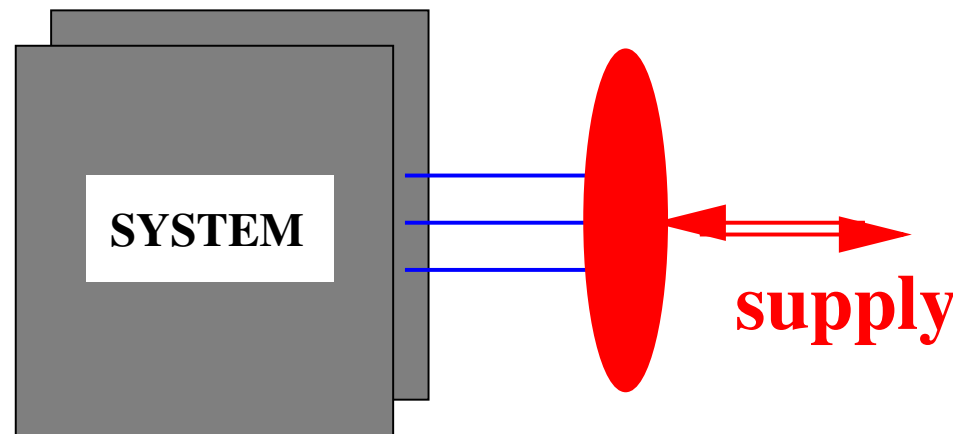

# THEME

A **dissipative** system absorbs **supply**.

How do we formalize this?

Physical examples.

Conditions for dissipativeness in terms of

(state space, transfer function) system representations.

Linear-quadratic theory.

Leads to important classical notion of **positive realness**.

How did this arise?

Direct applications of positive realness:

electrical circuit synthesis, covariance generation.

Applications to stability, stabilization, and robustness.

# DISSIPATIVE SYSTEMS: Def'n

**Dynamics:**

$$\Sigma : \quad \dot{\mathbf{x}} = f(\mathbf{x}, \mathbf{u}), \quad \mathbf{y} = h(\mathbf{x}, \mathbf{u}).$$

$$\mathbf{u} \in \mathbf{U} = \mathbb{R}^m, \mathbf{y} \in \mathbf{Y} = \mathbb{R}^p, \mathbf{x} \in \mathbf{X} = \mathbb{R}^n:$$

the input, output, and state.

**Behavior**  $\mathcal{B} :=$  all  $(\mathbf{u}, \mathbf{y}, \mathbf{x}) : \mathbb{R} \rightarrow \mathbf{U} \times \mathbf{Y} \times \mathbf{X}$  satisfying

$$\frac{d}{dt}\mathbf{x} = f(\mathbf{x}, \mathbf{u}), \quad \mathbf{y} = h(\mathbf{x}, \mathbf{u}).$$

$$\mathcal{B}_{\text{external}} := \{(\mathbf{u}, \mathbf{y}) \mid \exists \mathbf{x} : (\mathbf{u}, \mathbf{y}, \mathbf{x}) \in \mathcal{B}\}$$

**external behavior.**

# DISSIPATIVE SYSTEMS: Def'n

**Dynamics:**

$$\Sigma : \quad \dot{\mathbf{x}} = f(\mathbf{x}, \mathbf{u}), \quad y = h(\mathbf{x}, \mathbf{u}).$$

Let

$$s : \mathcal{U} \times \mathcal{Y} \rightarrow \mathbb{R}$$

be a function, called the ***supply rate***.

# DISSIPATIVE SYSTEMS: Def'n

$\Sigma$  is said to be **dissipative w.r.t.  $s$**  if  $\exists$

$$V : X \rightarrow \mathbb{R},$$

called the **storage function**, such that

$$V(x(t_2)) \leq V(x(t_1)) + \int_{t_1}^{t_2} s(u(t), y(t)) dt$$

$\forall t_2 \geq t_1$  along trajectories:  $\forall (u, y, x) \in \mathfrak{B}$ .

# DISSIPATIVE SYSTEMS: Def'n

or, incrementally,

$$\frac{d}{dt} V(x) \leq s(u, y)$$

## DISSIPATIVE SYSTEMS: Def'n

$$\frac{d}{dt} V(x) \leq s(u, y)$$

This  $\leq$  is called the *dissipation inequality*.  $\Leftrightarrow$

$$\dot{V}^\Sigma(x, u) := \nabla V(x) \cdot f(x, u) \leq s(u, h(x, u)) \quad \forall (x, u).$$

The function  $d : \mathbb{U} \times \mathbb{X} \rightarrow \mathbb{R}$  defined by

$$d(u, x) := s(u, h(x, u)) - \dot{V}^\Sigma(x, u)$$

is called the *dissipation rate* ( $\geq 0$ ).

If equality holds: *conservative system*.

# DISSIPATIVE SYSTEMS: Def'n

$$\frac{d}{dt} V(x) \leq s(u, y)$$

For power and energy


$$\begin{array}{l} s(u, y) \\ V(x) \end{array} \begin{array}{l} \cong \\ \cong \end{array} \begin{array}{l} \text{power delivered.} \\ \text{internal stored energy.} \end{array}$$

Dissipativity  $:\Leftrightarrow$

$$\text{rate of increase of stored energy} \leq \text{power delivered.}$$




# DISSIPATIVE SYSTEMS: Def'n

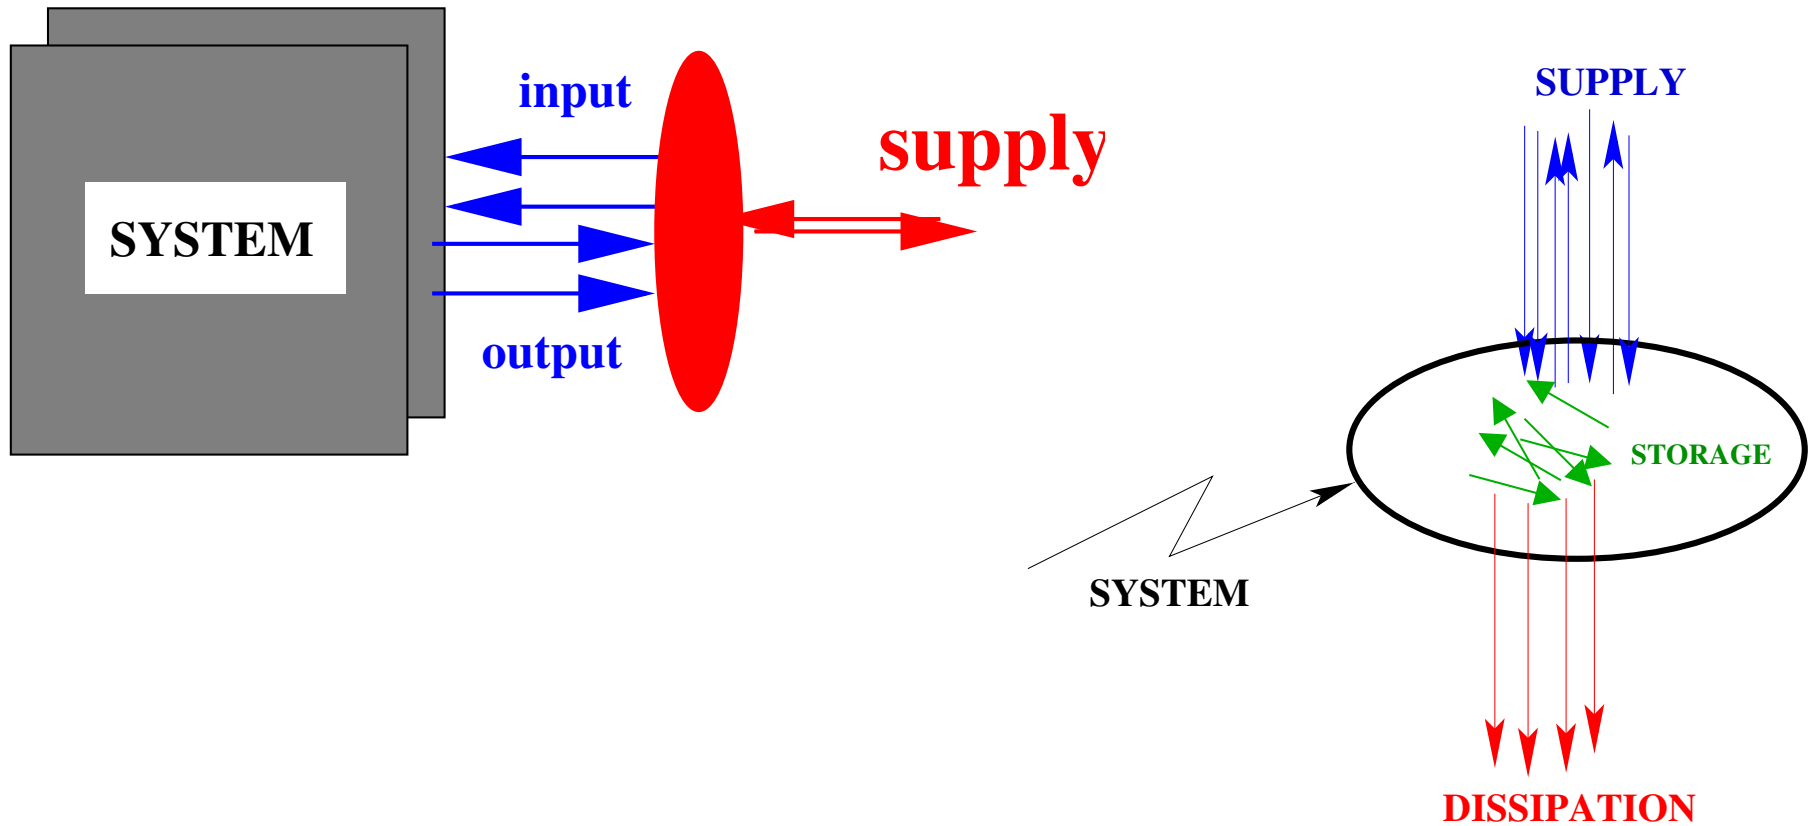

$$s(u, h(x, u)) = \dot{V}^\Sigma(x, u) + d(u, x) \quad d \geq 0$$

# PHYSICAL EXAMPLES

## Electrical circuit:

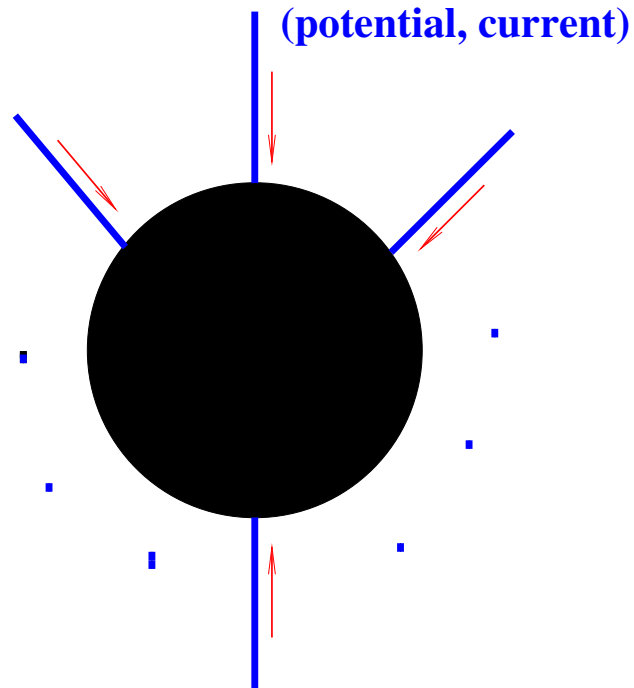


Dissipative w.r.t.  $\sum_{\ell=1}^N V_{\ell} I_{\ell}$  (electrical power).

# PHYSICAL EXAMPLES

<b>System</b>	<b>Supply</b>	<b>Storage</b>
<b>Electrical circuit</b>	$V^T I$ $V$ : voltage $I$ : current	energy in capacitors and inductors

# PHYSICAL EXAMPLES

## Mechanical device:

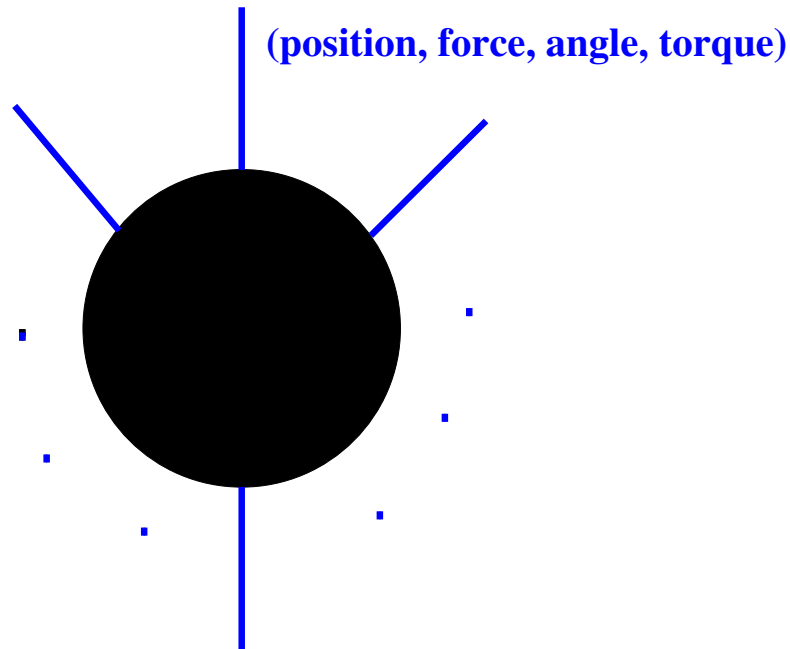


Dissipative w.r.t.  $\sum_{\ell=1}^N \left( \left( \frac{d}{dt} q_{\ell} \right)^{\top} F_{\ell} + \left( \frac{d}{dt} \theta_{\ell} \right)^{\top} T_{\ell} \right)$   
(mechanical power)

# PHYSICAL EXAMPLES

<b>System</b>	<b>Supply</b>	<b>Storage</b>
<b>Electrical circuit</b>	$V^\top I$ $V$ : voltage $I$ : current	energy in capacitors and inductors
<b>Mechanical system</b>	$F^\top v + \left(\frac{d}{dt}\theta\right)^\top T$ $F$ : force, $v$ : velocity $\theta$ : angle, $T$ : torque	potential + kinetic energy

# PHYSICAL EXAMPLES

## Thermodynamic system:

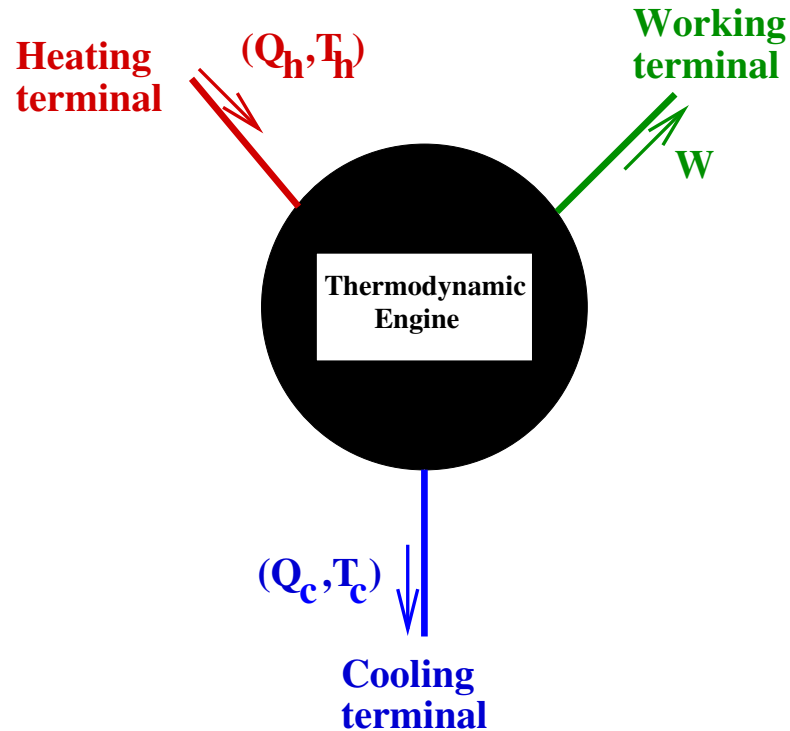

Conservative w.r.t.  $\sum_{\ell=1}^N Q_{\ell} + \sum_{\ell=1}^{N'} W_{\ell},$


Dissipative w.r.t.  $-\sum_{\ell=1}^N \frac{Q_{\ell}}{T_{\ell}}.$

# PHYSICAL EXAMPLES

<b>System</b>	<b>Supply</b>	<b>Storage</b>
<b>Electrical circuit</b>	$V^\top I$ $V$ : voltage $I$ : current	<b>energy in capacitors and inductors</b>
<b>Mechanical system</b>	$F^\top v + \left(\frac{d}{dt}\theta\right)^\top T$ $F$ : force, $v$ : velocity $\theta$ : angle, $T$ : torque	<b>potential + kinetic energy</b>
<b>Thermodynamic system</b>	$Q + W$ $Q$ : heat, $W$ : work	<b>internal energy</b>
<b>Thermodynamic system</b>	$-Q/T$ $Q$ : heat, $T$ : temp.	<b>entropy</b>
<b>etc.</b>	<b>etc.</b>	<b>etc.</b>

# CONSTRUCTION of STORAGE F'NS

*Given (a representation of )  $\Sigma$ , the dynamics, and given  $s$ , the supply rate, is the system dissipative w.r.t.  $s$ , i.e., does there exist a storage function  $V$  such that the dissipation inequality holds?*

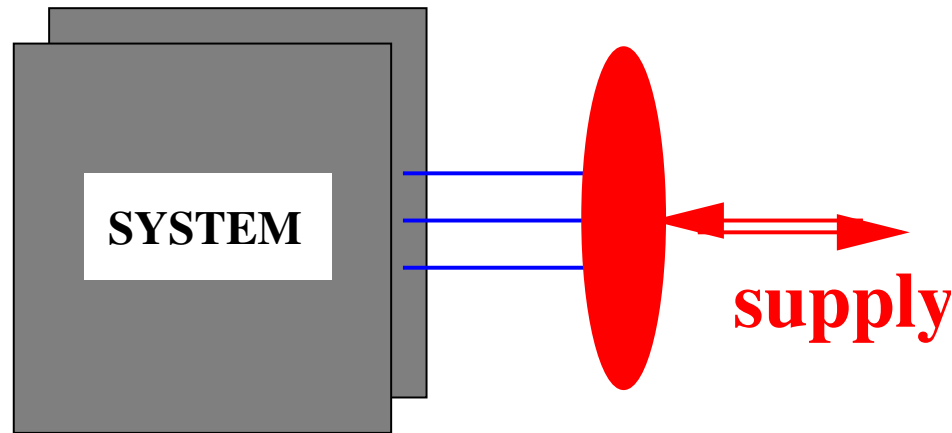

Monitor dynamics, power flow. **How much 'energy' is stored?**



# CONSTRUCTION of STORAGE F'NS

**Assume:**

1. **State space  $\mathbb{X}$  of  $\Sigma$  connected:**  
every state reachable from every other state;
2. **Observability:** given  $u, y$ ,  
 $\exists$  at most one  $x$  such that  $(u, y, x) \in \mathfrak{B}$ .

Let  $x^* \in \mathbb{X}$  be an element of  $\mathbb{X}$ , a 'normalization' point for the storage functions, since these are only defined by an additive constant.

# CONSTRUCTION of STORAGE F'NS

**Notation:**  $(x_1, t_1) \xrightarrow{u} (x_2, t_2)$   
:=  $u$  takes the state  $x_1$  at time  $t_1$  to state  $x_2$  at time  $t_2$ .

Consider the following two state f'ns, universal storage f'ns:

**The available storage:**  $V_{\text{available}}$ , defined by

$$V_{\text{available}}(x) := \sup_{T \geq 0, (u, y, x) \in \mathfrak{B}: (x, 0) \xrightarrow{u} (x^*, T)} \left\{ - \int_0^T s(u, y) dt \right\}$$

**The required supply:**  $V_{\text{required}}$ , defined by

$$V_{\text{required}}(x) := \inf_{T \geq 0, (u, y, x) \in \mathfrak{B}: (x^*, -T) \xrightarrow{u} (x, 0)} \left\{ \int_{-T}^0 s(u, y) dt \right\}$$

# CONSTRUCTION of STORAGE F'NS

**Note:**

if  $\mathbf{x}^* \in \mathbb{X}$  is an **equilibrium**, associated with  $\mathbf{u}^* \in \mathbb{U}$ ,  $\mathbf{y}^* \in \mathbb{Y}$  :


$$f(\mathbf{x}^*, \mathbf{u}^*) = 0, \mathbf{y}^* = h(\mathbf{x}^*, \mathbf{u}^*),$$

and

$$s(\mathbf{x}^*, \mathbf{u}^*) = 0,$$

then in def. of  $V_{\text{available}}$  and  $V_{\text{required}}$ , we can take  $\lim T \rightarrow \infty$ .

# CONSTRUCTION of STORAGE F'NS

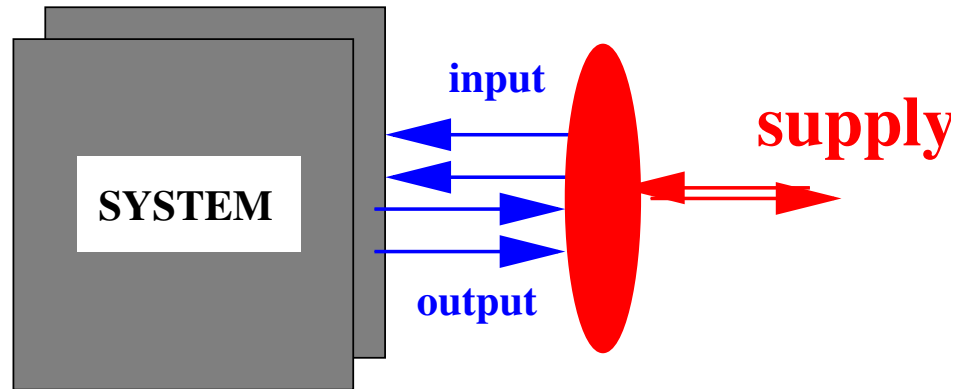

**!! Maximize** the supply extracted, starting in fixed initial state



**available storage.**

**!! Minimize** the supply needed to set up a fixed initial state



**required supply.**

# CONSTRUCTION of STORAGE F'NS

**Basic theorem:** Let  $\Sigma$  and  $s$  be given.

The following are equivalent:

1.  $\Sigma$  is dissipative w.r.t.  $s$  (i.e.  $\exists$  a storage f'n  $V$ )
- 2.

$$\oint s(u, y) dt \geq 0$$

for all **periodic**  $(u, y) \in \mathfrak{B}_{\text{external}}$ , equivalently, by observability, for all periodic  $(u, y, x) \in \mathfrak{B}$ .

3.  $V_{\text{available}} < \infty$
4.  $V_{\text{required}} > -\infty$

# CONSTRUCTION of STORAGE F'NS

**Basic theorem:** Let  $\Sigma$  and  $s$  be given.

Moreover, assuming that any of these conditions are satisfied, then

$$V_{\text{available}} \quad \text{and} \quad V_{\text{required}}$$

are both storage functions, the set of storage f'ns is convex, and

$$V_{\text{available}} - V_{\text{available}}(\mathbf{x}^*) \leq V - V(\mathbf{x}^*) \leq V_{\text{required}} - V_{\text{required}}(\mathbf{x}^*)$$

In fact,  $V_{\text{available}}(\mathbf{x}^*) = V_{\text{required}}(\mathbf{x}^*) = 0$ .

# PROOF of the BASIC TH'M

1.  $\Rightarrow$  2.:

$\Sigma$  is dissipative w.r.t.  $s \Rightarrow$

$$\oint s(u, y) dt \geq 0$$

for all **periodic**  $(u, y) \in \mathfrak{B}_{\text{external}}$ :

Use the dissipation inequality (and observability).

# PROOF of the BASIC TH'M

2.  $\Rightarrow$  3. :

$$V_{\text{available}} : X \rightarrow \mathbb{R}$$

- (i)  $V_{\text{available}}(\mathbf{x}) > -\infty$ : sup over non-empty set by reachability.
- (ii)  $V_{\text{available}}(\mathbf{x}) < \infty$ :

Note that by 2.,  $(u, y, x) \in \mathfrak{B}$  and  $(\mathbf{x}^*, T_1) \xrightarrow{u} (\mathbf{x}^*, T_2)$  implies  $\int_{T_1}^{T_2} s(u, y) dt \geq 0$ .

Concatenate  $(\mathbf{x}^*, -T') \xrightarrow{u'} (\mathbf{x}, 0)$  with  $(\mathbf{x}, 0) \xrightarrow{u} (\mathbf{x}^*, T)$ .  
Then

$$-\int_0^T s(u, y) dt \leq \int_{-T'}^0 s(u', y') dt.$$

Take the supremum over the left hand side.

Note  $V_{\text{available}}(\mathbf{x}^*) = 0$ : the sup then occurs for  $T = 0$ .



# PROOF of the BASIC TH'M

3.  $\Rightarrow$  1. :

$V_{\text{available}}$  satisfies the dissipation inequality:

$$\begin{aligned}
 & V_{\text{available}}(x(t_1)) \\
 &= \sup_{T \geq 0, (u, y, x) \in \mathfrak{B}: (x(t_1), t_1) \xrightarrow{u} (x^*, t_1 + T)} \left\{ - \int_{t_1}^{t_1 + T} s(u, y) dt \right\} \\
 &\geq \sup_{T \geq 0, (u, y, x) \in \mathfrak{B}: (x(t_1), t_1) \xrightarrow{u} (x^*, t_2 + T)} \left\{ - \int_{t_1}^{t_2 + T} s(u, y) dt \right\} \\
 &\geq - \int_{t_1}^{t_2} s(u, y) dt \\
 &\quad + \sup_{T \geq 0, (u, y, x) \in \mathfrak{B}: (x(t_2), t_2) \xrightarrow{u} (x^*, t_2 + T)} \left\{ - \int_{t_2}^{t_2 + T} s(u, y) dt \right\} \\
 &= - \int_{t_1}^{t_2} s(u, y) dt + V_{\text{available}}(x(t_2)).
 \end{aligned}$$

# PROOF of the BASIC TH'M

2.  $\Rightarrow$  4.  $\Rightarrow$  1. :

The proof with  $V_{\text{required}}$  as a storage function is analogous.

# PROOF of the BASIC TH'M

**Convexity** of the set of storage functions: obvious.

**Bound**  $V_{\text{available}} \leq V - V(x^*)$

Consider a trajectory  $(x, 0) \xrightarrow{u} (x^*, T)$ . The dissipation inequality implies

$$V(x) - V(x^*) \geq - \int_0^T s(u(t), y(t)) dt$$

Take the supremum of the right hand side.

# PROOF of the BASIC TH'M

**Bound**

$$V_{\text{available}} \leq V - V(x^*)$$

Consider a trajectory  $(x, 0) \xrightarrow{u} (x^*, T)$ . The dissipation inequality implies

$$V(x) - V(x^*) \geq - \int_0^T s(u(t), y(t)) dt$$

Take the supremum of the right hand side.

**Bound**

$$V - V(x^*) \leq V_{\text{required}}$$

is proven analogously.

# SMOOTHNESS

To make all arguments rigorous requires certain assumptions.

The behavior  $\mathfrak{B}$  of

$$\Sigma : \quad \dot{x} = f(x, u), \quad y = h(x, u).$$

must have the ‘state’ property, i.e.

$$(u_1, y_1, x_1), (u_2, y_2, x_2) \in \mathfrak{B}, t \in \mathbb{R}, \text{ and } x(t_1) = x(t_2)$$

$$\Rightarrow (u_1, y_1, x_1) \wedge_t (u_2, y_2, x_2) \in \mathfrak{B}$$

( $\wedge_t$  denotes *concatenation at  $t$* ).

This can be achieved by assuming that the set of admissible input functions  $\mathfrak{U} \subseteq \mathbb{U}^{\mathbb{R}}$  is closed under concatenation, and the sol’n set of  $x$ ’s consists of abs. cont. f’ns.

# SMOOTHNESS

To make all arguments rigorous requires certain assumptions.

The behavior  $\mathfrak{B}$  of

$$\Sigma : \quad \dot{\mathbf{x}} = f(\mathbf{x}, \mathbf{u}), \quad \mathbf{y} = h(\mathbf{x}, \mathbf{u}).$$

must have the property that  $s(\mathbf{u}, \mathbf{y})$  is locally integrable , i.e.

$$\int_{t_1}^{t_2} s(\mathbf{u}(t), \mathbf{y}(t)) dt < \infty \quad \forall (\mathbf{u}, \mathbf{y}, \mathbf{x}) \in \mathfrak{B}, t_1, t_2 \in \mathbb{R}$$

# SMOOTHNESS

To make all arguments rigorous requires certain assumptions.

The **equivalence of the global and local versions** of the dissipation inequality

$$1. V(x(t_2)) \leq V(x(t_1)) + \int_{t_1}^{t_2} s(u(t), y(t)) dt$$

$$\forall (u, y, x) \in \mathfrak{B}$$

$$2. \frac{d}{dt} V(x) \leq s(u, y) \quad \forall (u, y, x) \in \mathfrak{B}$$

$$3. \nabla V(x) \cdot f(x, u) \leq s(u, h(x, u)) \quad \forall u \in \mathbb{U}, x \in \mathbb{X}$$

also requires certain smoothness on  $\mathfrak{B}$ ,  $f$  and on  $V$ .

Obviously,  $V$  must be differentiable.

While for a given  $V$  one may simply wish to assume this, for

$V_{\text{available}}$  and  $V_{\text{required}}$ , if needed,

this **has to be proven**.

# SMOOTHNESS

To make all arguments rigorous requires certain assumptions.

1.  $V(x(t_2)) \leq V(x(t_1)) + \int_{t_1}^{t_2} s(u(t), y(t)) dt$   
 $\forall (u, y, x) \in \mathfrak{B}$
2.  $\frac{d}{dt} V(x) \leq s(u, y) \quad \forall (u, y, x) \in \mathfrak{B}$
3.  $\nabla V(x) \cdot f(x, u) \leq s(u, h(x, u)) \quad \forall u \in \mathbb{U}, x \in \mathbb{X}$

Note that assuming 1. for a ‘small’ behavior (e.g., having  $\mathcal{C}^\infty$ , and/or compact support conditions), deducing from there 3., will yield, by integrating, 1. for a ‘large’ behavior (e.g. with locally integrable  $u$ ’s, absolutely continuous  $x$ ’s).



# RECAP

● A system is **dissipative** : $\Leftrightarrow$

$$V(x(t_2)) \leq V(x(t_1)) + \int_{t_1}^{t_2} s(u, y) dt.$$

●  $\exists$  many physical examples of dissipative open systems.

●  $\exists$  storage function  $\Leftrightarrow$

$$\oint s(u, y) dt \geq 0$$

for all **periodic** trajectories.

● Universal storage functions:

**the available storage, the required supply.**

# LINEAR DIFFERENTIAL SYSTEMS

These admit many representations:

## 1. State space representation:

$$\Sigma : \quad \dot{\mathbf{x}} = A\mathbf{x} + B\mathbf{u}, \quad \mathbf{y} = C\mathbf{x} + D\mathbf{u}$$

$\mathbf{u} \in \mathbb{R}^m, \mathbf{y} \in \mathbb{R}^p, \mathbf{x} \in \mathbb{R}^n; A \in \mathbb{R}^{n \times n}, B \in \mathbb{R}^{n \times m}, C \in \mathbb{R}^{p \times n}, D \in \mathbb{R}^{p \times m}.$

Notation:  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ . Assume (in Part II & III) controllability and observability. *Behavior*

$\mathfrak{B} := (\mathbf{u}, \mathbf{y}, \mathbf{x}) : \mathbf{u} \in \mathcal{L}_2^{\text{loc}}(\mathbb{R}, \mathbb{R}^m), \mathbf{y} \in \mathcal{L}_2^{\text{loc}}(\mathbb{R}, \mathbb{R}^p), \mathbf{x} : \mathbb{R} \rightarrow \mathbb{R}^n \text{ abs. cont.}$

satisfying  $\frac{d}{dt}\mathbf{x}(t) = A\mathbf{x}(t) + B\mathbf{u}(t), \mathbf{y}(t) = C\mathbf{x}(t) + D\mathbf{u}(t) \quad \text{a.e.}$

Occasionally (when  $\mathbf{y}$  is unimportant, we will denote  $(\mathbf{u}, \mathbf{x}) \in \mathfrak{B}$ ).

# LINEAR DIFFERENTIAL SYSTEMS

These admit many representations:

## 2. Transfer function

$$G \in \mathbb{R}(\xi)^{p \times m}.$$

Usual interpretation via exponential or frequency response, or Laplace transform, or differential equation (**kernel representation**)

$$P\left(\frac{d}{dt}\right)y = Q\left(\frac{d}{dt}\right)u$$

with  $P \in \mathbb{R}^{p \times p}[\xi]$ ,  $Q \in \mathbb{R}^{p \times m}[\xi]$ ,  $G = P^{-1}Q$ , a left co-prime factorization, or (**image representation**)

$$u = D\left(\frac{d}{dt}\right)\ell, \quad y = N\left(\frac{d}{dt}\right)\ell,$$

with  $D \in \mathbb{R}^{m \times m}[\xi]$ ,  $N \in \mathbb{R}^{m \times p}[\xi]$ ,  $G = ND^{-1}$ , a right co-prime fact.

# LINEAR DIFFERENTIAL SYSTEMS

These admit many representations:

## 3. Impulse response

$$y(t) = H_0 u(t) + \int_0^t H(t - t') u(t') dt',$$

possibly 'completed'.

# LINEAR DIFFERENTIAL SYSTEMS

These admit many representations:

## 4. Relations among these representations

$$G(\xi) = D + C(I\xi - A)^{-1}B$$

$G \in \mathbb{R}(\xi)^{p \times m}$  = the Laplace transform of

$$t \in \mathbb{R}_+ \mapsto H_0\delta + H(t) \in \mathbb{R}^{p \times m}.$$

$$H_0 = D, H(t) = Ce^{At}B.$$

# QUADRATIC SUPPLY RATES

$s(\mathbf{u}, \mathbf{y}) =$  a quadratic form in  $(\mathbf{u}, \mathbf{y})$ .

$\rightsquigarrow$  a q.f. in  $(\mathbf{u}, \mathbf{x})$  ( $\mathbf{y}$  often not relevant, and by observability the properties - as periodicity, or  $\mathcal{L}_2$ , of  $(\mathbf{u}, \mathbf{y}, \mathbf{x})$  and  $(\mathbf{u}, \mathbf{x})$  coincide):

$$s(\mathbf{u}, \mathbf{x}) = \begin{bmatrix} \mathbf{u} \\ \mathbf{x} \end{bmatrix}^\top S \begin{bmatrix} \mathbf{u} \\ \mathbf{x} \end{bmatrix}, \quad S = \begin{bmatrix} R & L \\ L^\top & Q \end{bmatrix}, \quad R = R^\top, Q = Q^\top$$

with as important special cases

$$s(\mathbf{u}, \mathbf{y}) = \|\mathbf{u}\|^2 - \|\mathbf{y}\|^2,$$
$$m = p \quad \text{and} \quad s(\mathbf{u}, \mathbf{y}) = \mathbf{u}^\top \mathbf{y}.$$

Relevant in electrical circuits (supply rate:  $\langle \text{voltage}, \text{current} \rangle$ ),  
mechanics: (supply rate  $\langle \text{force}, \text{velocity} \rangle$ ), scattering repr., etc.

# LQ THEOREM

**Theorem:** Let  $\Sigma = \left[ \begin{array}{c|c} A & B \\ \hline \bullet & \bullet \end{array} \right]$  and  $s(\mathbf{u}, \mathbf{x}) = \begin{bmatrix} \mathbf{u} \\ \mathbf{x} \end{bmatrix}^\top S \begin{bmatrix} \mathbf{u} \\ \mathbf{x} \end{bmatrix}$  be given.

The following are equivalent:

1.  $\Sigma$  is dissipative w.r.t.  $s$ .

# LQ THEOREM

**Theorem:** Let  $\Sigma = \left[ \begin{array}{c|c} A & B \\ \hline \bullet & \bullet \end{array} \right]$  and  $s(u, x) = \begin{bmatrix} u \\ x \end{bmatrix}^\top S \begin{bmatrix} u \\ x \end{bmatrix}$  be given.

The following are equivalent:

## 2. Behavioral characterizations:

2.1

$$\oint s(u(t), x(t)) dt \geq 0$$

for all periodic  $(u, x) \in \mathfrak{B}$

2.2

$$\int_{-\infty}^{\infty} s(u(t), x(t)) dt \geq 0$$

for all  $(u, x) \in \mathfrak{B} \cap \mathcal{L}_2(\mathbb{R}, \mathbb{R}^m \times \mathbb{R}^n)$

2.3  $\dots \forall (u, x) \in \mathfrak{B} \cap \mathcal{D}(\mathbb{R}, \mathbb{R}^m \times \mathbb{R}^n); \mathcal{D} = \mathcal{C}^\infty$  with comp. supp.



# LQ THEOREM

**Theorem:** Let  $\Sigma = \left[ \begin{array}{c|c} A & B \\ \hline \bullet & \bullet \end{array} \right]$  and  $s(\mathbf{u}, \mathbf{x}) = \begin{bmatrix} \mathbf{u} \\ \mathbf{x} \end{bmatrix}^\top S \begin{bmatrix} \mathbf{u} \\ \mathbf{x} \end{bmatrix}$  be given.

The following are equivalent:

3.1  $\Sigma$  is dissipative w.r.t.  $s$  with a **quadratic** storage function.

3.2 **Linear matrix inequality (LMI):**

there exists  $K = K^\top \in \mathbb{R}^{n \times n}$  such that

$$\begin{bmatrix} A^\top K + KA - Q & KB - L^\top \\ B^\top K - L & -R \end{bmatrix} \leq 0$$

# LQ THEOREM

**Theorem:** Let  $\Sigma = \left[ \begin{array}{c|c} A & B \\ \hline \bullet & \bullet \end{array} \right]$  and  $s(\mathbf{u}, \mathbf{x}) = \begin{bmatrix} \mathbf{u} \\ \mathbf{x} \end{bmatrix}^\top S \begin{bmatrix} \mathbf{u} \\ \mathbf{x} \end{bmatrix}$  be given.

The following are equivalent:

## 4. Frequency-domain characterization

$$R + L(i\omega I - A)^{-1}B + B^\top(-i\omega I - A^\top)^{-1}L$$

$$+ B^\top(-i\omega I - A^\top)^{-1}Q(i\omega I - A)^{-1}B \geq 0$$

for all  $\omega \in \mathbb{R}$ ,  $i\omega \notin \sigma(A)$

$\sigma(\bullet)$  denotes the **spectrum**, the set of eigenvalues of  $\bullet$

## 5. Characterization in terms of **impulse response**: ??

## (LMI)

The matrix eq'n:

$$K = K^\top$$

$$\begin{bmatrix} A^\top K + KA - Q & KB - L^\top \\ B^\top K - L & -R \end{bmatrix} \leq 0$$

has become a **(the?)** key equation in systems and control theory.  
Note that this (LMI) states exactly that

$$\frac{d}{dt}x = Ax + Bu$$

$$\Rightarrow \frac{d}{dt}x^\top Kx \leq \begin{bmatrix} u \\ x \end{bmatrix}^\top \begin{bmatrix} R & L \\ L^\top & Q \end{bmatrix} \begin{bmatrix} u \\ x \end{bmatrix},$$

i.e. that  $x^\top Kx$  is a (quadratic) storage f'n.

## (LMI)

The matrix eq'n:

$$K = K^\top$$

$$\begin{bmatrix} A^\top K + KA - Q & KB - L^\top \\ B^\top K - L & -R \end{bmatrix} \leq 0$$

has become a **(the?)** key equation in systems and control theory.

Solution set is convex, compact, and attains its infimum  $K_-$  and its supremum  $K_+$ :

$$K_- \leq K \leq K_+$$

$x^\top K_- x$  = available storage,  $x^\top K_+ x$  = required supply.

(LMI)

The matrix eq'n:

$$K = K^T$$

$$\begin{bmatrix} A^T K + KA - Q & KB - L^T \\ B^T K - L & -R \end{bmatrix} \leq 0$$

has become a **(the?)** key equation in systems and control theory.

If  $R > 0$ , then equivalent to **Algebraic Riccati inequality (ARIineq)**

$$K = K^T$$

$$A^T K + KA - Q + (KB - L^T)R^{-1}(B^T K - L) \leq 0$$

## (LMI)

If  $R > 0$ , then equivalent to **Algebraic Riccati inequality (ARIneq)**

$$K = K^\top$$

$$A^\top K + KA - Q + (KB - L^\top)R^{-1}(B^\top K - L) \leq 0$$

In fact, there exist sol'ns to (ARIneq)

$\Leftrightarrow$  there exist sol'ns to the **Algebraic Riccati equation (ARE)**

$$K = K^\top$$

$$A^\top K + KA - Q + (KB - L^\top)R^{-1}(B^\top K - L) = 0$$

In particular, the extreme sol'n  $K_-$  and  $K_+$  of (LMI) satisfy (ARE).  
There exist various other characterizations of  $K_-$ ,  $K_+$ .

# PROOF of LQ TH'M and (LMI)

We will prove the equivalence of the following 10 statements:

- I.  $\exists V \dots$  (1, page 15)
- II.  $\exists$  quadratic  $V \dots$  (3.1, page 15)
- III.  $\oint \geq 0$  for all periodic  $\dots$  (2.1, page 15)
- IV.  $\int \geq 0$  for all  $\mathcal{L}_2 \dots$  (2.2, page 15)
- V.  $\int \geq 0$  for all  $\mathcal{L}_2$  of compact support  $\dots$
- VI.  $\int \geq 0$  for all  $\mathcal{C}^\infty$  of compact support  $\dots$  (2.3, page 15)
- VII. Frequency domain condition (4, page 15)
- VIII. (LMI) (3.2, page 15)
- IX. For  $R > 0$ , solvability of the (ARIneq) (page 16)
- X. For  $R > 0$ , solvability of the (ARE) (page 16);  $K_-, K_+$  sol'ns.

# PROOF of LQ TH'M and (LMI)

I  $\Rightarrow$  VIII

I:  $\exists V \dots \Rightarrow$  VIII:  $\exists$  sol'n to the (LMI)

The difficult part is the following proposition, which we take for granted

**Proposition:** Assume that

$$\sup_{T \geq 0, (x,0) \xrightarrow{u} (0,T)} \left\{ - \int_0^T s(u, x) dt \right\} < \infty \quad \forall x \in \mathbb{R}^n$$

Then this supremum is a quadratic form in  $x$ ,

$$x^\top K x, \quad \text{and} \quad K = K^\top.$$

It follows from the basic th'm that  $x^\top K x$  satisfies the dissipation inequality, equivalently, the (LMI).



# PROOF of LQ TH'M and (LMI)

I  $\Rightarrow$  VIII

VIII  $\Leftrightarrow$  IX

Include VIII  $\Leftrightarrow$  IX only in the case  $R > 0$ .

VIII:  $\exists$  sol'n to the (LMI)  $\Rightarrow$  IX:  $\exists$  sol'n to the (ARIneq)

**Schur complement:** Let  $M_{11} = M_{11}^\top, M_{22} = M_{22}^\top > 0$ . Then

$$\begin{bmatrix} M_{11} & M_{12} \\ M_{12}^\top & M_{22} \end{bmatrix} \geq 0 \Leftrightarrow M_{11} - M_{12}M_{22}^{-1}M_{12}^\top \geq 0.$$

# PROOF of LQ TH'M and (LMI)

$$I \Rightarrow VIII \quad VIII \Leftrightarrow IX \quad IX \Leftrightarrow X$$

Include  $IX \Leftrightarrow X$  only in the case  $R > 0$ .

$$IX: \exists \text{ sol'n to (ARIneq)} \Leftrightarrow X: \exists \text{ sol'n to (ARE), } K_-, K_+ \text{ sol'ns}$$

$\Rightarrow$  is trivial. To show  $\Rightarrow$ , use the following proposition, a clever idea due to C. Scherer.

**Proposition:** Assume  $F = F^\top \geq 0$ ,  $H = H^\top$ , and  $(A, F)$  controllable. Then if the ARIneq

$$X = X^\top, \quad A^\top X + XA + XFX + H \leq 0$$

has a sol'n, so does the (ARE)

$$Y = Y^\top, \quad A^\top Y + YA + YFY + H = 0$$

**Proof:** Define  $P := -(A^\top X + XA + XFX + H)$  and consider the (ARE)

$$D = D^\top, \quad (A + FX)^\top D + D(A + FX) + DFD - P = 0.$$

This is a 'standard' (in the sense that  $F \geq 0$ ,  $P \geq 0$ ,  $(A, F)$  contr.) (ARE) of the theory of LQ optimal control. We assume that it is known that a sol'n  $D$  exists. Now prove by a straightforward calculation that  $Y = X + D$  solves the (ARE). Now, there even exist a sol'ns  $D \geq 0$  and  $\leq 0$ . Hence the infimal and supremal sol's of (LMI) and (ARleq) solve (ARE).

# PROOF of LQ TH'M and (LMI)

**I  $\Rightarrow$  VIII**   **VIII  $\Leftrightarrow$  IX**   **IX  $\Leftrightarrow$  X**   **VIII  $\Leftrightarrow$  II  $\Rightarrow$  I**

**VIII:  $\exists$  sol'n to (ARE)**  $\Leftrightarrow$  **II:  $\exists$  quadratic  $V \dots$**   $\Rightarrow$   **$\exists V \dots$**

Trivial.

# PROOF of LQ TH'M and (LMI)

**I  $\Rightarrow$  VIII**

**VIII  $\Leftrightarrow$  IX**

**IX  $\Leftrightarrow$  X**

**VIII  $\Leftrightarrow$  II  $\Rightarrow$  I**

**I  $\Leftrightarrow$  III**

**I:  $\exists V \dots \Rightarrow$  III:  $\mathcal{J} \geq 0$  for all periodic  $\dots$**

**Basic theorem of dissipative systems.**

# PROOF of LQ TH'M and (LMI)

I  $\Rightarrow$  VIII

VIII  $\Leftrightarrow$  IX

IX  $\Leftrightarrow$  X

VIII  $\Leftrightarrow$  II  $\Rightarrow$  I

I  $\Leftrightarrow$  III

III  $\Rightarrow$  VII

III:  $\mathcal{J} \geq 0$  for all periodic  $\dots \Rightarrow$  VII: Frequency condition

Use your frequency domain intelligence.

Consider the (complex) periodic inputs  $u(t) = ae^{i\omega t}$ .

For all  $\omega \in \mathbb{R} : i\omega \notin \sigma(A)$ , there is an associated periodic  $x(t) = be^{i\omega t}$  with  $b = (i\omega I - A)^{-1}Ba$ .

Calculate  $\mathcal{J}$  and obtain the frequency condition.

# PROOF of LQ TH'M and (LMI)

$$I \Rightarrow VIII$$

$$VIII \Leftrightarrow IX$$

$$IX \Leftrightarrow X$$

$$VIII \Leftrightarrow II \Rightarrow I$$

$$I \Leftrightarrow III$$

$$III \Rightarrow VII$$

$$VII \Rightarrow IV$$

$$VII: \text{Frequency condition} \Rightarrow IV: \int \geq 0 \text{ for all } \mathcal{L}_2 \dots$$

Assume that  $(u, x) \in \mathfrak{B} \cap \mathcal{L}_2$ . Use Parseval's theorem to compute  $\int_{-\infty}^{\infty} s(u(t), x(t)) dt$ .

# PROOF of LQ TH'M and (LMI)

$$I \Rightarrow VIII$$

$$VIII \Leftrightarrow IX$$

$$IX \Leftrightarrow X$$

$$VIII \Leftrightarrow II \Rightarrow I$$

$$I \Leftrightarrow III$$

$$III \Rightarrow VII$$

$$VII \Rightarrow IV$$

$$IV \Rightarrow V \Rightarrow VI$$

$$IV: \int \geq 0 \forall \mathcal{L}_2$$

$$\Rightarrow$$

$$V: \forall \text{ c. supp.}$$

$$\Rightarrow$$

$$VI: \forall \mathcal{C}^\infty \text{ c. supp.}$$

Trivial.

# PROOF of LQ TH'M and (LMI)

$$\begin{array}{ccccc} \text{I} \Rightarrow \text{VIII} & \text{VIII} \Leftrightarrow \text{IX} & \text{IX} \Leftrightarrow \text{X} & \text{VIII} \Leftrightarrow \text{II} \Rightarrow \text{I} & \text{I} \Leftrightarrow \text{III} \\ \text{III} \Rightarrow \text{VII} & \text{VII} \Rightarrow \text{IV} & \text{IV} \Rightarrow \text{V} \Rightarrow \text{VI} & \text{VI} \Rightarrow \text{III} & \end{array}$$

$$\text{VI: } \int \geq 0 \forall \mathcal{C}^\infty \text{ c. supp.} \Rightarrow \text{III: } \oint \geq 0 \text{ for all periodic } \dots$$

Assume the contrary, truncate this periodic sol'n after a large number of periods, make the truncation into a compact support sol'n, and smooth (e.g. by convoluting with a  $\mathcal{C}^\infty$  compact support kernel) in order to obtain a compact support  $\mathcal{C}^\infty$  solution that violates VI.



## PROOF of LQ TH'M and (LMI)

$$\begin{array}{ccccc} \text{I} \Rightarrow \text{VIII} & \text{VIII} \Leftrightarrow \text{IX} & \text{IX} \Leftrightarrow \text{X} & \text{VIII} \Leftrightarrow \text{II} \Rightarrow \text{I} & \text{I} \Leftrightarrow \text{III} \\ \text{III} \Rightarrow \text{VII} & \text{VII} \Rightarrow \text{IV} & \text{IV} \Rightarrow \text{V} \Rightarrow \text{VI} & \text{VI} \Rightarrow \text{III} & \end{array}$$

That the set of sol's of the (LMI) (and hence of the (ARIneq) for  $R > 0$ ) is convex and compact is trivial. The inequality

$$K_- \leq K \leq K_+$$

follows immediately from the interpretation of  $K_-$  and  $K_+$  in terms of the available storage and the required supply.

# RECAP

- A **linear** differential system with a **quadratic** supply rate is **dissipative**  $\Leftrightarrow$  there exists a **quadratic** storage function.
- Leads *linea recta* to the (LMI).
- The set of sol'ns of this (LMI) is convex, compact, and attains its infimum  $K_-$  and its supremum  $K_+$ .
- These correspond to the available storage and required supply.
- The (LMI) is very closely related to algebraic Riccati inequality and the algebraic Riccati equation. The extreme sol'ns  $K_-$ ,  $K_+$  of the (LMI) are sol'ns of the (ARE) (when  $R > 0$ ).
- There is also an explicit condition for dissipativity in terms of the frequency response.

# NON-NEGATIVE STORAGE F'NS

Do storage functions need be  $\geq 0$ ?

Since one can always add a constant, one should really ask:

**Are storage functions bounded from below?**

We did **NOT** demand this. The reason is physics:

in **mechanics** (e.g. a mass in an inverse square gravitational field), the energy need not be bounded from below,  
in **thermodynamics**, the entropy (often the log of the temp.) need not be bounded from above or below.

Nevertheless, in applications (stability, circuit synthesis)  $\geq$  of the storage f'n is essential. We will cover the LQ cases

$$s(\mathbf{u}, \mathbf{y}) = \|\mathbf{u}\|^2 - \|\mathbf{y}\|^2 \quad (\text{contractivity})$$

$$s(\mathbf{u}, \mathbf{y}) = \mathbf{u}^\top \mathbf{y} \quad (\text{positive realness})$$

# CONTRACTIVITY

We start with a bit of notation and recalling a couple of definitions:

$$\mathbb{C}_- := \{s \in \mathbb{C} \mid \operatorname{Real}(s) < 0\}$$

$$\mathbb{C}_+ := \{s \in \mathbb{C} \mid \operatorname{Real}(s) > 0\}$$

$$\mathbb{C}_{0-} := \{s \in \mathbb{C} \mid \operatorname{Real}(s) \leq 0\}$$

$$\mathbb{C}_{0+} := \{s \in \mathbb{C} \mid \operatorname{Real}(s) \geq 0\}$$

$\bar{\phantom{x}}$  = complex conjugate.

# CONTRACTIVITY

We start with a bit of notation and recalling a couple of definitions:

$A \in \mathbb{R}^{n \times n}$  is **Hurwitz**  $:\Leftrightarrow \sigma(A) \subset \mathbb{C}_-$ .

Equivalently, of course, all trajectories of  $\dot{\mathbf{x}} = A\mathbf{x}$  go to zero as  $t \rightarrow \infty$ .

$A \in \mathbb{R}^{n \times n}$  is **almost Hurwitz**  $:\Leftrightarrow$

1.  $\sigma(A) \subset \mathbb{C}_{0-}$ ,
2. the eigenvalues on the imaginary axis are semi-simple.

Equivalently, of course, all trajectories of  $\dot{\mathbf{x}} = A\mathbf{x}$  are bounded on  $[0, \infty)$ .

# CONTRACTIVITY

We start with a bit of notation and recalling a couple of definitions:

Let  $G \in \mathbb{R}^{m \times n}(\xi)$ . Its  $\mathcal{H}_\infty$ -norm equals

$$\|G\|_{\mathcal{H}_\infty} := \supremum \{ \|G(s)\| \mid s \in \mathbb{C}_+ \}.$$

$\|G\|_{\mathcal{H}_\infty} < \infty \Leftrightarrow G$  proper, no poles in  $\mathbb{C}_{0+}$  ( $\Leftrightarrow A$  Hurwitz).

Then

$$\|G\|_{\mathcal{H}_\infty} = \supremum \{ \|G(i\omega)\| \mid \omega \in \mathbb{R} \}.$$

$\|G\|_{\mathcal{H}_\infty}$  equals the  $\mathcal{L}_2$  induced norm of the operator  $u \mapsto y$ ,

$$y(t) = H_0 u(t) + \int_{0 \text{ or } -\infty}^t H(t-t') u(t') dt'.$$

Call  $G$  **contractive**  $:\Leftrightarrow \|G\|_{\mathcal{H}_\infty} \leq 1$ .

# CONTRACTIVITY

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = \|u\|^2 - \|y\|^2$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.

# CONTRACTIVITY

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = \|u\|^2 - \|y\|^2$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
2. The **(LMI)**

$$K = K^T > 0$$

$$\begin{bmatrix} A^T K + K A + C^T C & K B + C^T D \\ B^T K + D^T C & -I + D^T D \end{bmatrix} \leq 0$$

has a solution. Equivalently, the supremal sol'n  **$K_+ > 0$** .



# CONTRACTIVITY

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = \|u\|^2 - \|y\|^2$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
3. **Behavioral characterization:**

$$\int_{-\infty}^0 (\|u(t)\|^2 - \|y(t)\|^2) dt \geq 0$$

for all  $(u, y) \in \mathcal{B}_{\text{ext}} \cap \mathcal{L}_2(\mathbb{R}, \mathbb{R}^m \times \mathbb{R}^p)$ .

This is called **half-line dissipativity**.

Note: upper bound 0 on  $\int$  immaterial, may as well take  $\int_{-\infty}^t$ .

# CONTRACTIVITY

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = \|u\|^2 - \|y\|^2$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
4. **Frequency-domain characterization:**  
 **$G$  is contractive**, i.e.  $\|G\|_{\mathcal{H}_\infty} \leq 1$ .
5.  $\Sigma$  is dissipative w.r.t.  $s$ , and  **$A$  is Hurwitz**.

# CONTRACTIVITY

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = \|u\|^2 - \|y\|^2$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
- 1'.  $\Sigma$  diss. w.r.t.  $s$ , with **all** storage f'n bounded from below.

# CONTRACTIVITY

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = \|u\|^2 - \|y\|^2$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
- 2'. All solutions of the **(LMI)**

$$K = K^\top$$

$$\begin{bmatrix} A^\top K + KA + C^\top C & KB + C^\top D \\ B^\top K + D^\top C & -I + D^\top D \end{bmatrix} \preceq 0$$

are  $> 0$ . Equivalently, the infimal sol'n  **$K_- > 0$** .

# CONTRACTIVITY

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = \|u\|^2 - \|y\|^2$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.

6.,7.,... Various variations, with  $\geq 0$  instead of  $> 0$ ,  $\mathcal{C}^\infty$ , compact support, ARineq, (ARE), etc.

# PROOF of CONTRACTIVITY TH'M

**Preliminary:** The **inertia** of  $M \in \mathbb{R}^{n \times n}$  is defined as the triple

$$\text{In}(M) := (\nu(M), \zeta(M), \pi(M))$$

with  $\nu(M), \zeta(M), \pi(M)$  = the number (counting multiplicity) of eigenvalues of  $M$  with respectively real part  $> 0, = 0, < 0$ .

Of course  $\nu(M) + \zeta(M) + \pi(M) = n$ .

Btw,  $\pi(M) - \nu(M)$  is called the **signature** of  $M$ .

Recall the following result involving the inertia and the **Lyapunov equation**

$$A^T P + P A + Q = 0.$$

**Theorem:** Assume that  $(A, P, Q)$  satisfy the Lyapunov eq'n, with  $P = P^T, Q = Q^T \geq 0$ , and  $(A, Q)$  is observable. Then  $\zeta(A) = 0$ , and  $\text{In}(P) = \text{In}(A)$ .

# PROOF of CONTRACTIVITY TH'M

Note that each of the conditions of the th'm implies that  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$  is dissipative w.r.t.  $s(u, y) = \|u\|^2 - \|y\|^2$ . Therefore, we can freely use the LQ th'm, and assume the existence of  $K_-$ ,  $K_+$ , etc.

Each sol'n  $K = K^\top$  of the (LMI) satisfies

$$A^\top K + KA + C^\top C \leq 0.$$

Since  $(A, C)$  is observable, so is  $(A, A^\top K + KA)$ .

The inertia theorem therefore implies that **all these  $K$ 's are non-singular** and have the **same number of positive and negative eigenvalues**.

# PROOF of CONTRACTIVITY TH'M

1.  $\Rightarrow$  2.

By the basic th'm on dissipativity, there holds for any storage function  $V$ ,

$$\underline{x}^\top K_- \underline{x} \leq V(\underline{x}) - V(0) \leq \underline{x}^\top K_+ \underline{x}.$$

Hence  $V$  bounded from below implies  $\underline{x}^\top K_+ \underline{x}$  bounded from below. Since  $K_+$  is non-singular, it is bounded from below if and only if  $K_+ \geq 0$ , but since it also non-singular,  $K_+ > 0$ .



# PROOF of CONTRACTIVITY TH'M

**1.  $\Rightarrow$  2.**

**2.  $\Rightarrow$  3.** By 2.,  $K_+ > 0$ . By the inertia th'm, therefore,  $A$  is Hurwitz. Assume that 3. does not hold. Then there is  $(u', y') \in \mathcal{B}_{\text{ext}} \cap \mathcal{L}_2(\mathbb{R}, \mathbb{R}^m \times \mathbb{R}^p)$  such that

$$\int_{-\infty}^0 (\|u'(t)\|^2 - \|y'(t)\|^2) dt < 0.$$

Consider the input  $u''$ , with  $u''(t) = u'(t)$  for  $t \leq 0$ , and  $u''(t) = 0$  for  $t > 0$ . Since  $A$  is Hurwitz, the resulting  $y''$  with  $y''(t) = y'(t)$  for  $t \leq 0$  yields  $(u'', y'') \in \mathcal{B}_{\text{ext}} \cap \mathcal{L}_2(\mathbb{R}, \mathbb{R}^m \times \mathbb{R}^p)$ , and

$$\int_{-\infty}^{+\infty} (\|u''(t)\|^2 - \|y''(t)\|^2) dt < 0.$$

**Contradicts dissipativeness.**

# PROOF of CONTRACTIVITY TH'M

1.  $\Rightarrow$  2.

2.  $\Rightarrow$  3.

3.  $\Rightarrow$  4. 3. implies dissipativeness. Therefore

$$\sup \{ \|G(i\omega)\| \mid \omega \in \mathbb{R} \} \leq 1.$$

We need to prove that 3. implies that  $G$  has no poles  $\mathbb{C}_{0+}$ , i.e., that  $A$  is Hurwitz. If this were not the case, choose a (compact support) input that is zero for  $t \geq 0$ , and such that  $x(0)$  yields a  $y$  with  $\int_0^\infty \|y(t)\|^2 = \infty$ . Hence for  $T$  sufficiently large

$$\int_{-\infty}^T (\|u(t)\|^2 - \|y(t)\|^2) dt < 0.$$

Contradicts 3.

# PROOF of CONTRACTIVITY TH'M

1.  $\Rightarrow$  2.

2.  $\Rightarrow$  3.

3.  $\Rightarrow$  4.

4.  $\Rightarrow$  5.

**obvious**

# PROOF of CONTRACTIVITY TH'M

1.  $\Rightarrow$  2.

2.  $\Rightarrow$  3.

3.  $\Rightarrow$  4.

4.  $\Rightarrow$  5.

5.  $\Rightarrow$  1.

By dissipativeness there exist sol'ns  $K = K^T$  to the (LMI). By the inertia theorem they are all  $> 0$ . 1. follows.

# PROOF of CONTRACTIVITY TH'M

$$1. \Rightarrow 2.$$

$$2. \Rightarrow 3.$$

$$3. \Rightarrow 4.$$

$$4. \Rightarrow 5.$$

$$5. \Rightarrow 1.$$

$$2. \Rightarrow 2'.$$

use the inertia theorem.

# PROOF of CONTRACTIVITY TH'M

1.  $\Rightarrow$  2.

2.  $\Rightarrow$  3.

3.  $\Rightarrow$  4.

4.  $\Rightarrow$  5.

5.  $\Rightarrow$  1.

2.  $\Rightarrow$  2'.

2'.  $\Rightarrow$  1'.

follows from

$$\mathbf{x}^\top \mathbf{K}_- \mathbf{x} \leq V(\mathbf{x}) - V(0) \leq \mathbf{x}^\top \mathbf{K}_+ \mathbf{x}$$

and  $\mathbf{K}_- > 0$ .

# PROOF of CONTRACTIVITY TH'M

$$1. \Rightarrow 2.$$

$$2. \Rightarrow 3.$$

$$3. \Rightarrow 4.$$

$$4. \Rightarrow 5.$$

$$5. \Rightarrow 1.$$

$$2. \Rightarrow 2'.$$

$$2'. \Rightarrow 1'.$$

$$1'. \Rightarrow 1.$$

trivial.

# PROOF of CONTRACTIVITY TH'M

$$1. \Rightarrow 2.$$

$$2. \Rightarrow 3.$$

$$3. \Rightarrow 4.$$

$$4. \Rightarrow 5.$$

$$5. \Rightarrow 1.$$

$$2. \Rightarrow 2'.$$

$$2'. \Rightarrow 1'.$$

$$1'. \Rightarrow 1.$$



# POSITIVE REALNESS

A **VERY** important notion in system theory:

$g \in \mathbb{R}(\xi)$  is **positive real (p.r.)**: $\Leftrightarrow$

$$\{s \in \mathbb{C}_+\} \Rightarrow \{g(s) \in \mathbb{C}_+\}.$$

$\exists$  numerous equivalent conditions for positive realness. E.g.:

$$\{s \in \mathbb{C}_{0+}, \quad s \text{ not a pole of } g\} \Rightarrow \{g(s) \in \mathbb{C}_{0+}\}$$

and, more intricate,

1.  $\text{Real}(g(i\omega)) \geq 0$  for all  $\omega \in \mathbb{R}$
2.  $g$  has no poles in  $\mathbb{C}_+$
3. the im. axis poles of  $g$  are simple, with residue real and  $> 0$
4.  $\frac{g(s)}{s}$  is proper, and its limit for  $s \rightarrow \infty$  is  $\geq 0$

# POSITIVE REALNESS

**Matrix case:**

$G \in \mathbb{R}^{m \times m}(\xi)$  is **positive real (p.r.)**: $\Leftrightarrow$

$$\{s \in \mathbb{C}_+\} \Rightarrow \{G(s) + G^\top(\bar{s}) \geq 0\}.$$

$G^\top(\bar{s})$  is the **Hermitian conjugate** of  $G(s)$ .

# POSITIVE REALNESS

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(\mathbf{u}, \mathbf{y}) = \mathbf{u}^\top \mathbf{y}$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.

# POSITIVE REALNESS

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = u^\top y$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
2. The **(LMI)** (note: the corresponding storage f'n is  $\frac{1}{2}x^\top Kx$ )

$$K = K^\top > 0$$

$$\begin{bmatrix} A^\top K + KA & KB - C^\top \\ B^\top K - C & -D - D^\top \end{bmatrix} \leq 0$$

has a solution. Equivalently, the supremal sol'n  **$K_+ > 0$** .

# POSITIVE REALNESS

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = u^\top y$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
3. **Behavioral characterization:**

$$\int_{-\infty}^0 u(t)^\top y(t) dt \geq 0$$

for all  $(u, y) \in \mathcal{B}_{\text{ext}} \cap \mathcal{L}_2(\mathbb{R}, \mathbb{R}^m \times \mathbb{R}^p)$ .

This is called **half-line dissipativity**.

# POSITIVE REALNESS

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = u^\top y$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
4. **Frequency-domain characterization:**  **$G$  is positive real**.
5.  $\Sigma$  is dissipative w.r.t.  $s$ , and  $A$  is almost Hurwitz.

# POSITIVE REALNESS

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = u^\top y$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
- 1'.  $\Sigma$  diss. w.r.t.  $s$ , with **all** storage f'n bounded from below.

# POSITIVE REALNESS

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = u^\top y$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.
- 2'. All solutions of the **(LMI)**

$$K = K^\top$$

$$\begin{bmatrix} A^\top K + KA & KB - C^\top \\ B^\top K - C & -D - D^\top \end{bmatrix} \leq 0$$

are  $> 0$ . Equivalently, the infimal sol'n  **$K_- > 0$** .



# POSITIVE REALNESS

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = u^\top y$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.

6.,7.,... Various variations, with  $\geq 0$  instead of  $> 0$ ,  $\mathcal{C}^\infty$ , compact support, ARineq, (ARE), etc.

# POSITIVE REALNESS

**Theorem:** Consider  $\left[ \begin{array}{c|c} A & B \\ \hline C & D \end{array} \right]$ , controllable & observable, and  $s(u, y) = u^\top y$ . The following are equivalent:

1.  $\Sigma$  diss. w.r.t.  $s$ , with a storage f'n that is **bounded from below**, or, equivalently, **non-negative**.

It is customary to refer to this case as **PASSIVITY**.

## POSITIVE REALNESS

In the special case  $D = 0$  ( $G$  strictly proper), the (LMI) becomes

$$\begin{aligned} K &= K^\top > 0, \\ A^\top K + KA &\leq 0, \\ KB &= C^\top. \end{aligned}$$

The fact that solvability of this (LMI) is equivalent to positive realness of  $G(\xi) = C(I\xi - A^{-1})B$  is usually called the **KYP-lemma** (after Kalman, Yakubovich, Popov).

# POSITIVE REALNESS

In this case, it is possible to express passivity as a ‘sort of’ condition on the impulse response:

$$\begin{bmatrix} \frac{H(0) + H(0)^\top}{2} & H(t_2 - t_1) & H(t_3 - t_1) & \cdots & H(t_k - t_1) \\ H^\top(t_2 - t_1) & \frac{H(0) + H(0)^\top}{2} & H(t_3 - t_2) & \cdots & H(t_k - t_2) \\ H^\top(t_3 - t_1) & H^\top(t_3 - t_2) & \frac{H(0) + H(0)^\top}{2} & \cdots & H(t_k - t_3) \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ H^\top(t_k - t_1) & H(t_k - t_2)^\top & H^\top(t_k - t_3) & \cdots & \frac{H(0) + H(0)^\top}{2} \end{bmatrix} \geq 0$$

for all  $0 \leq t_1 \leq t_2 \leq \cdots \leq t_k$  and all  $k \in \mathbb{N}$ .

The proof will not be given.

## PROOF of the P.R. TH'M

We give the proof only in the case  $D = 0$ . It makes some points of independent interest, namely that the choice of inputs and outputs in a system is not something that is 'fixed'. The system eq'ns are

$$\Sigma : \dot{\mathbf{x}} = A\mathbf{x} + B\mathbf{u}, \quad y = C\mathbf{x} \quad \rightsquigarrow \text{behavior } \mathfrak{B}.$$

With the new input and output

$$\mathbf{u}' = \frac{1}{2}(\mathbf{u} + y), \quad y' = \frac{1}{2}(\mathbf{u} - y),$$

the system equations become

$$\Sigma' : \dot{\mathbf{x}} = (A - BC)\mathbf{x} + 2B\mathbf{u}', \quad y' = -C\mathbf{x} + \mathbf{u}' \quad \rightsquigarrow \text{beh. } \mathfrak{B}'$$

Obviously  $(u, y, x) \in \mathfrak{B} \Leftrightarrow (\frac{1}{2}(u + y), \frac{1}{2}(u - y), x) \in \mathfrak{B}'$ .

## PROOF of the P.R. TH'M

Define  $s'(u', y') = \|u'\|^2 - \|y'\|^2$ . Note that  $s'(u', y') = u^{\top} y = s(u, y)$ .

Hence  $\Sigma$  is dissipative w.r.t.  $s$  with storage function  $V$   
 $\Leftrightarrow \Sigma'$  is dissipative w.r.t.  $s'$  with storage function  $V$ .

Conclude that

- 1. of the contractivity th'm  $\Leftrightarrow$  1. of the p.r. th'm.
- 1'. of the contractivity th'm  $\Leftrightarrow$  1'. of the p.r. th'm.
- 2. of the contractivity th'm  $\Leftrightarrow$  2. of the p.r. th'm.
- 2'. of the contractivity th'm  $\Leftrightarrow$  2'. of the p.r. th'm.

and from the relation between  $s$  and  $s'$

- 3. of the contractivity th'm  $\Leftrightarrow$  3. of the p.r. th'm.

## PROOF of the P.R. TH'M

Note that the transfer functions  $G'$  of  $\Sigma'$  and  $G$  of  $\Sigma$  are related by the fractional transformation

$$G' = (I - G)(I + G)^{-1}.$$

Now, for  $M \in \mathbb{C}^{n \times n}$ , there holds

$$M + M^* \geq 0 \Leftrightarrow I + M \text{ invertible and } \|(I - M)(I + M)^{-1}\| \leq 1.$$

Conclude that

$$\|G'\|_{\mathcal{H}_\infty} \leq 1 \Leftrightarrow G \text{ positive real.}$$

Hence, 4. of the contractivity th'm  $\Leftrightarrow$  4. of the p.r. th'm.

## PROOF of the P.R. TH'M

We still need to prove that 2.  $\Leftrightarrow$  5. This uses the following

**Lemma:** Assume

$$K = K^\top, A^\top K + KA \leq 0, \text{ and } KB = C^\top.$$

Then

$$A \text{ is almost Hurwitz } \Leftrightarrow K > 0.$$

Assume that 5. holds. Then, by dissipativeness, the (LMI) has a sol'n  $K = K^\top$ . By the lemma,  $K = K^\top > 0$ , whence 2. holds. Conversely, if 2. holds, then, by the lemma,  $A$  is almost Hurwitz.



## PROOF of the P.R. TH'M

We still need to prove that 2.  $\Leftrightarrow$  5. This uses the following

**Lemma:** Assume

$$K = K^\top, A^\top K + KA \leq 0, \text{ and } KB = C^\top.$$

Then

$$A \text{ is almost Hurwitz } \Leftrightarrow K > 0.$$

Assume that 5. holds. Then, by dissipativeness, the (LMI) has a sol'n  $K = K^\top$ . By the lemma,  $K = K^\top > 0$ , whence 2. holds. Conversely, if 2. holds, then, by the lemma,  $A$  is almost Hurwitz.

I wasn't able to construct a proof of  $\Rightarrow$  of the lemma in time.

*In cauda venenum*

# RECAP

- **Non-negativity of the storage function is important in the analysis of physical systems, and in stability applications.**
- **For  $s(u, y) = \|u\|^2 - \|y\|^2$ , positivity of the (all) storage function comes down to the condition  $\|G\|_{\mathcal{H}_\infty} \leq 1$ .**
- **For  $s(u, y) = u^\top y$ , positivity of the (all) storage function comes down to positive realness of  $G$ .**
- **Recently, a n.a.s.c. for the existence of a positive storage function in the general LQ case has been published by Trentelman and Rapisarda (SIAM J. Control & Opt., 2003?).**