



DISSIPATIVE DISTRIBUTED SYSTEMS

Jan C. Willems
K.U. Leuven, Belgium

The University of Tokyo

May 9, 2005

Lyapunov functions

Lyapunov functions

Consider the classical dynamical system, the *‘flow’*

$$\Sigma : \frac{d}{dt}x = f(x)$$

with $x \in \mathbb{X} = \mathbb{R}^n$ the *state* and $f : \mathbb{X} \rightarrow \mathbb{X}$ the *vectorfield*.

Denote the set of solutions $x : \mathbb{R} \rightarrow \mathbb{X}$ by \mathfrak{B} , the *‘behavior’*.

Lyapunov functions

Consider the classical dynamical system, the *flow*

$$\Sigma : \frac{d}{dt}x = f(x)$$

with $x \in \mathbb{X} = \mathbb{R}^n$ the *state* and $f : \mathbb{X} \rightarrow \mathbb{X}$ the *vectorfield*.

Denote the set of solutions $x : \mathbb{R} \rightarrow \mathbb{X}$ by \mathfrak{B} , the *behavior*.


$$V : \mathbb{X} \rightarrow \mathbb{R}$$

is said to be a *Lyapunov function* for Σ if along $x \in \mathfrak{B}$

$$\frac{d}{dt} V(x(\cdot)) \leq 0$$

Equivalently, if $\dot{V}^\Sigma := \nabla V \cdot f \leq 0$.

Typical Lyapunov theorem

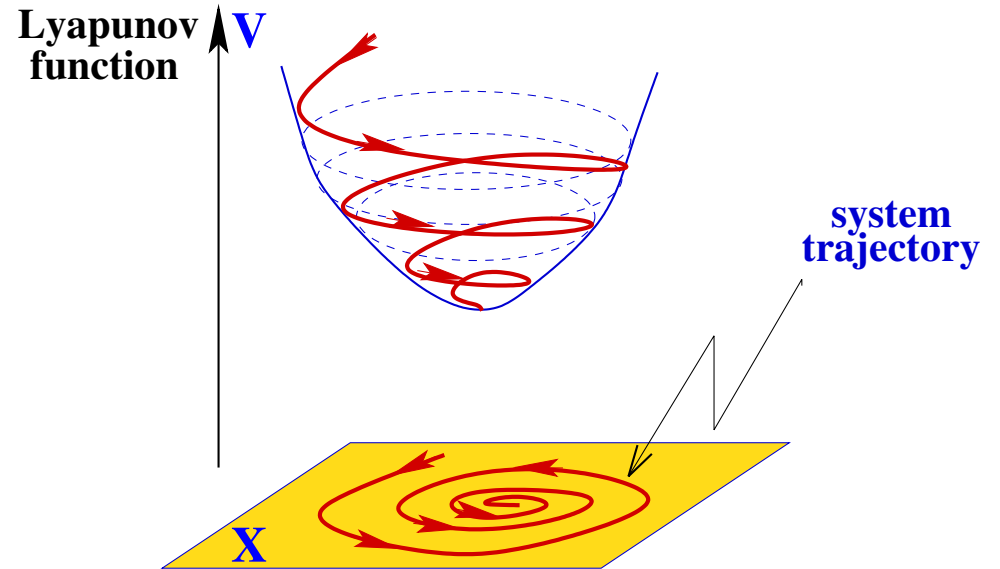

$$V(x) > 0 \text{ and } \dot{V}^\Sigma(x) < 0 \text{ for } 0 \neq x \in \mathbb{X}$$

\Rightarrow

$\forall x \in \mathfrak{B}$, there holds $x(t) \rightarrow 0$ for $t \rightarrow \infty$ **‘global stability’**

Lyapunov

Lyapunov f'ns play a remarkably central role in the field.




Aleksandr Mikhailovich Lyapunov (1857-1918)

Introduced Lyapunov's 'second method' in his thesis (1899).

Dissipative systems

Open systems

‘Open’ systems are a much more appropriate starting point for the study of dynamics. For example,

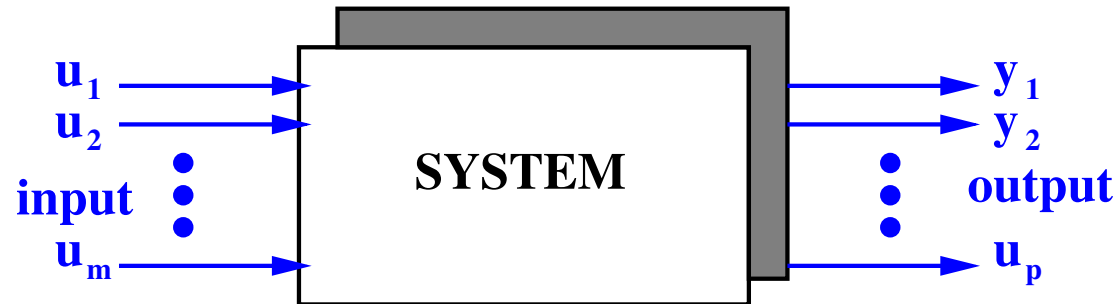

\rightsquigarrow the **dynamical system**

$$\Sigma : \quad \frac{d}{dt} x = f(x, u), \quad y = h(x, u).$$

$u \in U = \mathbb{R}^m, y \in Y = \mathbb{R}^p, x \in X = \mathbb{R}^n$: **input, output, state.**

Behavior $\mathcal{B} =$ all sol'ns $(u, y, x) : \mathbb{R} \rightarrow U \times Y \times X$.

Dissipative dynamical systems

Let $s : \mathbb{U} \times \mathbb{Y} \rightarrow \mathbb{R}$ be a function, called the *supply rate*.

Σ is said to be *dissipative* w.r.t. the supply rate s if \exists

$$V : \mathbb{X} \rightarrow \mathbb{R},$$

called the *storage function*, such that

$$\frac{d}{dt} V(x(\cdot)) \leq s(u(\cdot), y(\cdot))$$

$\forall (u(\cdot), y(\cdot), x(\cdot)) \in \mathfrak{B}$.

Dissipation inequality

$$\frac{d}{dt} V(x(\cdot)) \leq s(u(\cdot), y(\cdot))$$

$$\forall (u(\cdot), y(\cdot), x(\cdot)) \in \mathfrak{B}.$$

This inequality is called the *dissipation inequality*.


Equivalent to

$$\dot{V}^\Sigma(x, u) := \nabla V(x) \cdot f(x, u) \leq s(u, h(x, u))$$

for all $(u, x) \in \mathbb{U} \times \mathbb{X}$.

If equality holds: **'conservative' system.**

Dissipation inequality

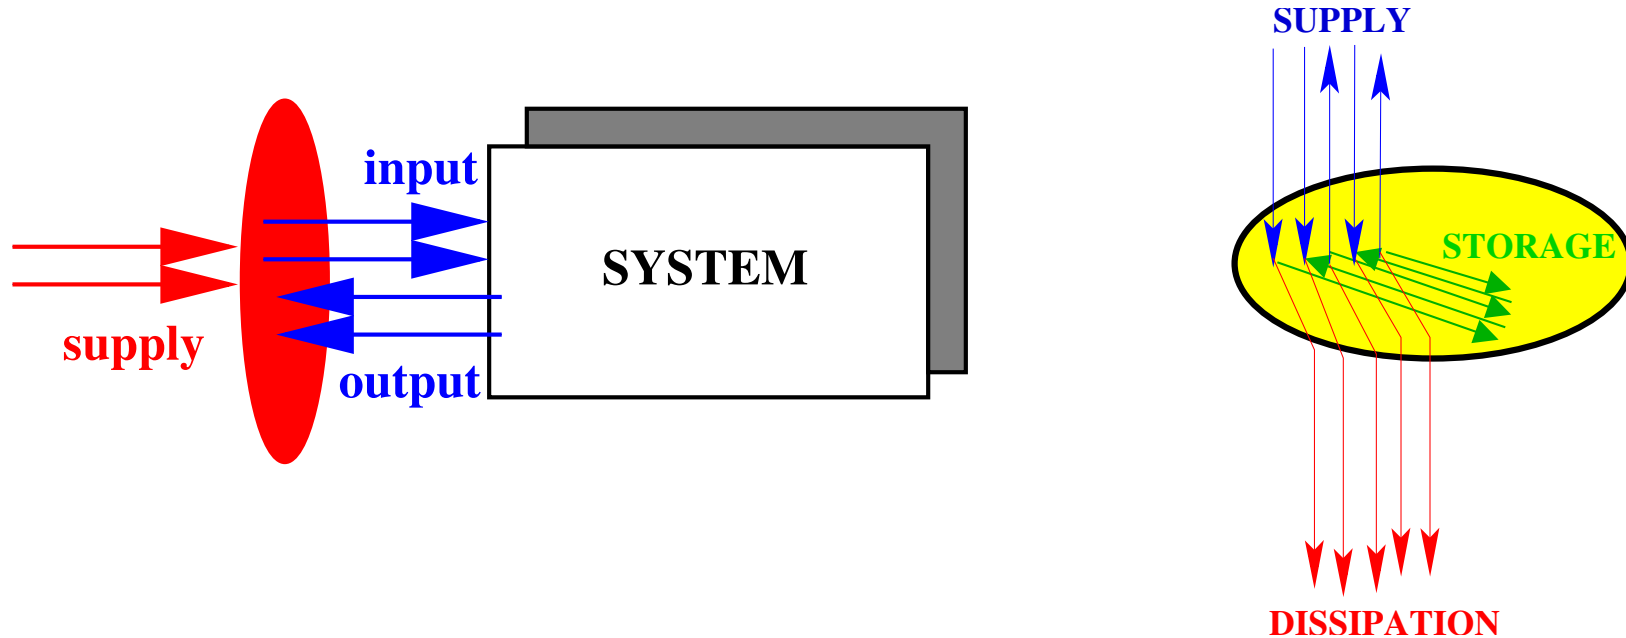

$s(u, y)$ models something like the **power** delivered to the system when the input value is u and output value is y .

$V(x)$ then models the internally **stored energy**.

Dissipativity $:\Leftrightarrow$

rate of increase of internal energy \leq power delivered.

Dissipation inequality

Special case: ‘closed’ system: $s = 0$ then

dissipativeness $\leftrightarrow V$ is a Lyapunov function.

Dissipativity is the natural generalization to open systems of Lyapunov theory.

Dissipation inequality

Special case: ‘closed’ system: $s = 0$ then

dissipativeness $\leftrightarrow V$ is a Lyapunov function.

Dissipativity is the natural generalization to open systems of Lyapunov theory.

Stability for closed systems \simeq Dissipativity for open systems.

The construction of storage functions


Basic question:

**Given (a representation of) Σ , the dynamics,
and given s , the supply rate,
is the system dissipative w.r.t. s , i.e.
does there exist a storage function V such that
the dissipation inequality holds?**

The construction of storage functions

Basic question:

Given (a representation of) Σ , **the dynamics**,
and given s , **the supply rate**,
is the system dissipative w.r.t. s , i.e.
does there exist **a storage function** V such that
the dissipation inequality holds?

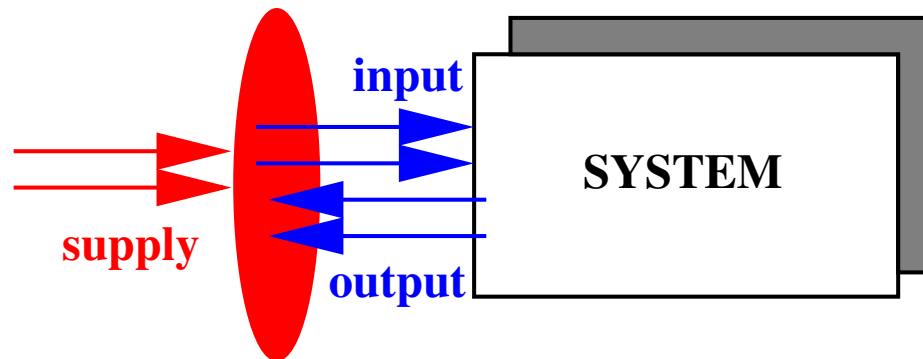

Monitor power in, known dynamics, **what is the stored energy?**

The construction of storage functions

The construction of storage functions is very well understood, particularly for finite dimensional linear systems and quadratic supply rates.

The construction of storage functions

The construction of storage functions is very well understood, particularly for finite dimensional linear systems and quadratic supply rates.

Leads to the KYP-lemma, LMI's, ARIneq, ARE, semi-definite programming, spectral factorization, Lyapunov functions, \mathcal{H}_∞ and robust control, positive and bounded real functions, electrical circuit synthesis, stochastic realization theory.

The construction of storage functions

The construction of storage functions is very well understood, particularly for finite dimensional linear systems and quadratic supply rates.

Leads to the KYP-lemma, LMI's, ARIneq, ARE, semi-definite programming, spectral factorization, Lyapunov functions, \mathcal{H}_∞ and robust control, positive and bounded real functions, electrical circuit synthesis, stochastic realization theory.

The storage function V is in general far from unique. There are two 'canonical' storage functions:

the available storage and the required supply.

For conservative systems, V is unique.

Dissipative systems

Dissipative systems and storage functions play a remarkably central role in the field.

Dissipative systems

Dissipative systems and storage functions play a remarkably central role in the field.

The construction of storage functions is the question which we shall discuss today for systems described by PDE's.

PDE's

PDE's: polynomial notation

Consider, for example, the PDE:

$$w_1(x_1, x_2) + \frac{\partial^2}{\partial x_2^2} w_1(x_1, x_2) + \frac{\partial}{\partial x_1} w_2(x_1, x_2) = 0$$
$$w_2(x_1, x_2) + \frac{\partial^3}{\partial x_2^3} w_1(x_1, x_2) + \frac{\partial^4}{\partial x_1^4} w_2(x_1, x_2) = 0$$

PDE's: polynomial notation

Consider, for example, the PDE:

$$w_1(x_1, x_2) + \frac{\partial^2}{\partial x_2^2} w_1(x_1, x_2) + \frac{\partial}{\partial x_1} w_2(x_1, x_2) = 0$$

$$w_2(x_1, x_2) + \frac{\partial^3}{\partial x_2^3} w_1(x_1, x_2) + \frac{\partial^4}{\partial x_1^4} w_2(x_1, x_2) = 0$$



Notation:

$$\xi_1 \leftrightarrow \frac{\partial}{\partial x_1}, \quad \xi_2 \leftrightarrow \frac{\partial}{\partial x_2}, \quad w = \begin{bmatrix} w_1 \\ w_2 \end{bmatrix}, \quad R(\xi_1, \xi_2) = \begin{bmatrix} 1 + \xi_2^2 & \xi_1 \\ \xi_2^3 & 1 + \xi_1^4 \end{bmatrix}$$

$$R\left(\frac{\partial}{\partial x_1}, \frac{\partial}{\partial x_2}\right) w = 0.$$

Linear differential distributed systems

$\mathbb{T} = \mathbb{R}^n$, the set of independent variables,
typically $n = 4$: time and space,
 $\mathbb{W} = \mathbb{R}^w$, the set of dependent variables,
 $\mathcal{B} =$ **the solutions of a linear constant coefficient PDE.**

Linear differential distributed systems

$\mathbb{T} = \mathbb{R}^n$, the set of independent variables,

typically $n = 4$: time and space,

$\mathbb{W} = \mathbb{R}^w$, the set of dependent variables,

$\mathfrak{B} =$ **the solutions of a linear constant coefficient PDE.**

Let $R \in \mathbb{R}^{\bullet \times w}[\xi_1, \dots, \xi_n]$, and consider

$$R \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) w = 0. \quad (*)$$

Define the associated behavior


$$\mathfrak{B} = \{ w \in \mathcal{C}^\infty(\mathbb{R}^n, \mathbb{R}^w) \mid (*) \text{ holds} \}.$$

Notation for n -D linear differential systems:

$$(\mathbb{R}^n, \mathbb{R}^w, \mathfrak{B}) \in \mathfrak{L}_n^w, \quad \text{or } \mathfrak{B} \in \mathfrak{L}_n^w.$$

Examples

Heat diffusion in a bar

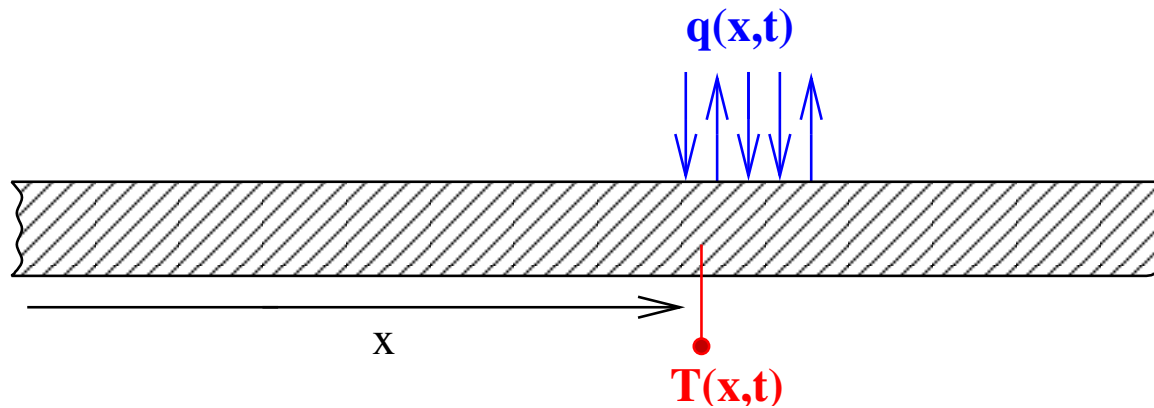

~> the PDE

$$\frac{\partial T}{\partial t} = \frac{\partial^2 T}{\partial x^2} + q$$

($x \in \mathbb{R}$, position, $t \in \mathbb{R}$, time), (2-D system)

describes the evolution of the temperature $T(x, t)$ and the heat $q(x, T)$ supplied to / radiated away.

Examples

The voltage $V(x, t)$ and current $I(x, t)$ in a *coaxial cable*



$$\begin{aligned}\frac{\partial}{\partial x} V &= RI - L \frac{\partial}{\partial t} I, \\ \frac{\partial}{\partial x} I &= GV - C \frac{\partial}{\partial t} V.\end{aligned}$$

R the resistance, L the inductance, C the capacitance of the cable, G the conductance of the dielectric medium, all per unit length.

(2-D system)

Examples

Maxwell's equations



$$\begin{aligned}\nabla \cdot \vec{E} &= \frac{1}{\epsilon_0} \rho, \\ \nabla \times \vec{E} &= -\frac{\partial}{\partial t} \vec{B}, \\ \nabla \cdot \vec{B} &= 0, \\ c^2 \nabla \times \vec{B} &= \frac{1}{\epsilon_0} \vec{j} + \frac{\partial}{\partial t} \vec{E}.\end{aligned}$$

Examples

Maxwell's equations



$$\begin{aligned}\nabla \cdot \vec{E} &= \frac{1}{\epsilon_0} \rho, \\ \nabla \times \vec{E} &= -\frac{\partial}{\partial t} \vec{B}, \\ \nabla \cdot \vec{B} &= 0, \\ c^2 \nabla \times \vec{B} &= \frac{1}{\epsilon_0} \vec{j} + \frac{\partial}{\partial t} \vec{E}.\end{aligned}$$

$\mathbb{T} = \mathbb{R} \times \mathbb{R}^3$ (time and space) $\rightsquigarrow n = 4$ **(4-D system)**,

$w = (\vec{E}, \vec{B}, \vec{j}, \rho)$

(electric field, magnetic field, current density, charge density),

$\mathbb{W} = \mathbb{R}^3 \times \mathbb{R}^3 \times \mathbb{R}^3 \times \mathbb{R}$, $\rightsquigarrow w = 10$,

\mathfrak{B} = set of solutions to these PDE's.

Note: 10 variables, 8 equations! $\Rightarrow \exists$ free variables.

Elimination theorem

Theorem:

If the behavior of $(w_1, \dots, w_k, w_{k+1}, \dots, w_w)$ obeys a constant coefficient linear PDE, then so does the behavior of (w_1, \dots, w_k) !

Elimination theorem

Theorem:

If the behavior of $(w_1, \dots, w_k, w_{k+1}, \dots, w_w)$ obeys a constant coefficient linear PDE, then so does the behavior of (w_1, \dots, w_k) !

Which PDE's describe (ρ, \vec{E}, \vec{j}) in Maxwell's equations ?

Eliminate \vec{B} from Maxwell's equations \rightsquigarrow

$$\begin{aligned}\nabla \cdot \vec{E} &= \frac{1}{\epsilon_0} \rho, \\ \epsilon_0 \frac{\partial}{\partial t} \nabla \cdot \vec{E} + \nabla \cdot \vec{j} &= 0, \\ \epsilon_0 \frac{\partial^2}{\partial t^2} \vec{E} + \epsilon_0 c^2 \nabla \times \nabla \times \vec{E} + \frac{\partial}{\partial t} \vec{j} &= 0.\end{aligned}$$

Image representation

$$\mathcal{R} \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) w = 0$$

is called a **kernel representation** of the associated $\mathfrak{B} \in \mathcal{L}_n^w$.

Image representation

$$R \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) w = 0$$

is called a **kernel representation** of the associated $\mathfrak{B} \in \mathfrak{L}_n^w$.
Another representation: **image representation**

$$w = M \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) \ell$$

Elimination thm $\Rightarrow \text{im} \left(M \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) \right) \in \mathfrak{L}_n^w !$
Do all behaviors of linear constant coefficient PDE's admit an image representation???

Image representation

$$R \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) w = 0$$

is called a **kernel representation** of the associated $\mathfrak{B} \in \mathfrak{L}_n^w$.
Another representation: **image representation**

$$w = M \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) \ell$$


Elimination thm $\Rightarrow \text{im} \left(M \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) \right) \in \mathfrak{L}_n^w !$

Do all behaviors of linear constant coefficient PDE's admit an image representation???

$\mathfrak{B} \in \mathfrak{L}_n^w$ admits an image representation iff it is **'controllable'**.

Controllability


Def'n in pictures:

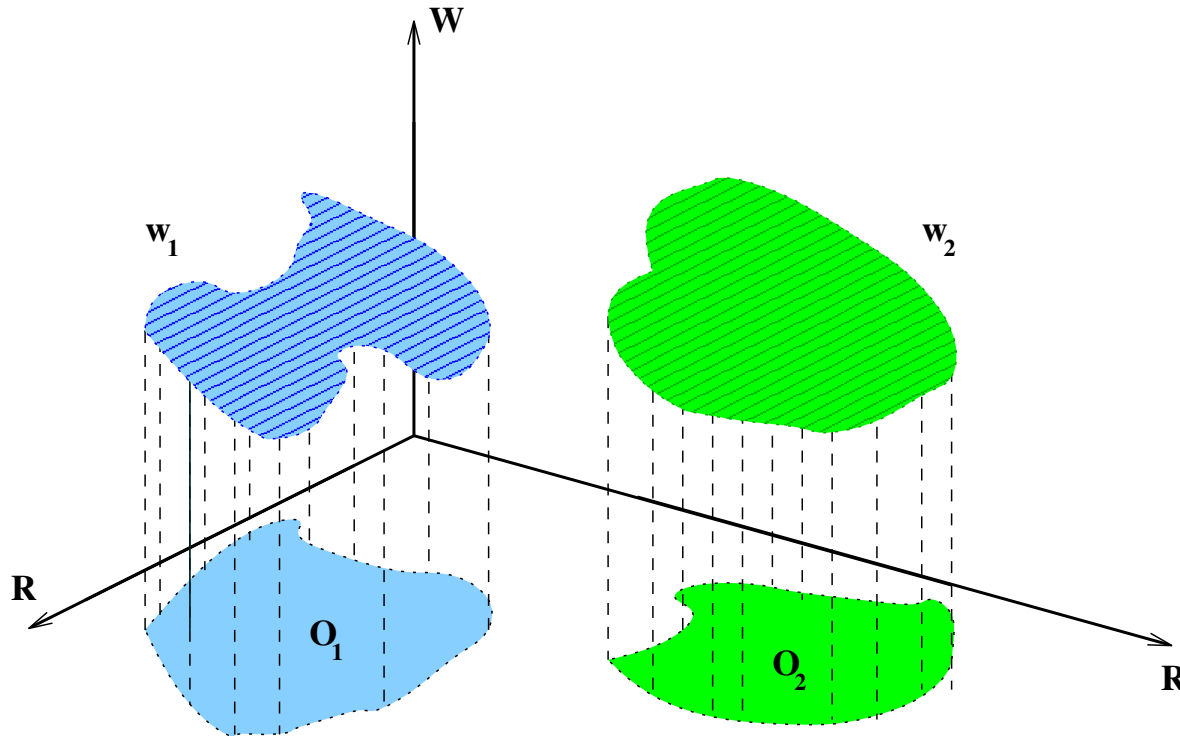

$$w_1, w_2 \in \mathcal{B}.$$

Controllability

Def'n in pictures:

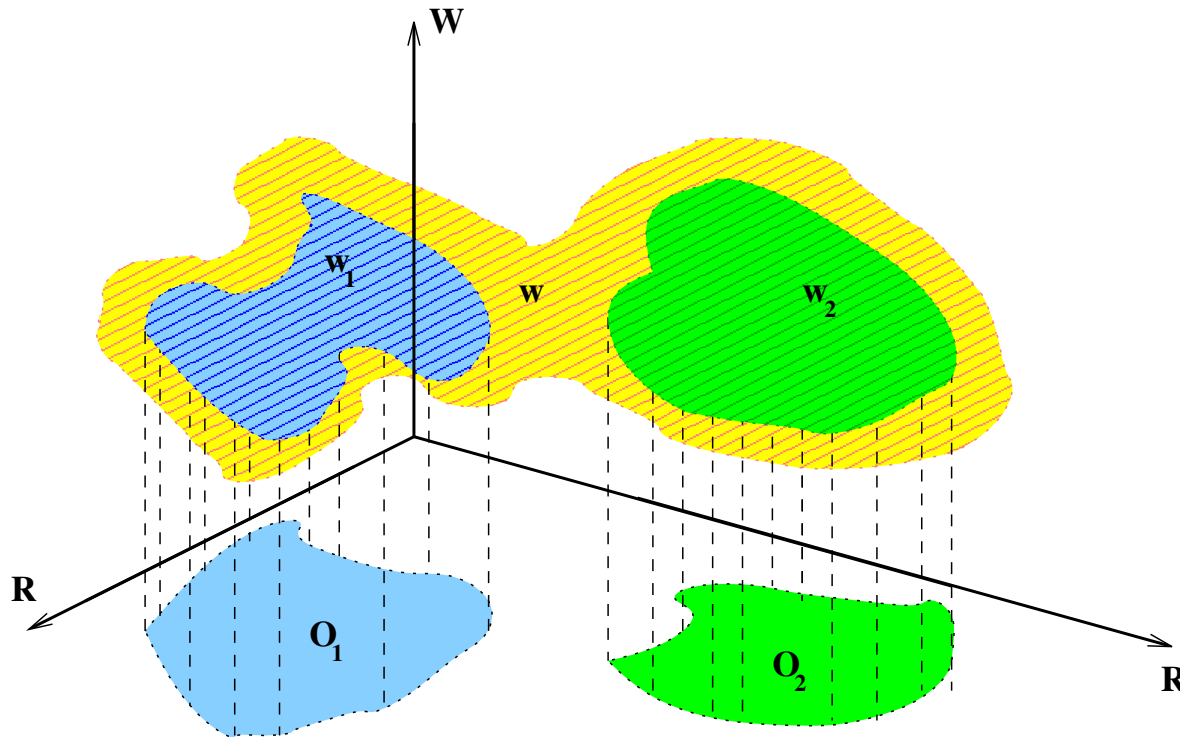

w 'patches' $w_1, w_2 \in \mathfrak{B}$.

$\exists w \in \mathfrak{B} \forall w_1, w_2 \in \mathfrak{B}$: **Controllability \Leftrightarrow 'patchability'.**

Controllability

Theorem: The following are equivalent:

1. $\mathfrak{B} \in \mathcal{L}_n^w$ is **controllable**
2. \mathfrak{B} admits an **image representation**
3. ...

Are Maxwell's equations controllable ?

Are Maxwell's equations controllable ?

The following equations

in the *scalar potential* $\phi : \mathbb{R} \times \mathbb{R}^3 \rightarrow \mathbb{R}$ and

the *vector potential* $\vec{A} : \mathbb{R} \times \mathbb{R}^3 \rightarrow \mathbb{R}^3$

generate exactly the solutions to Maxwell's equations:

$$\vec{E} = -\frac{\partial}{\partial t}\vec{A} - \nabla\phi,$$

$$\vec{B} = \nabla \times \vec{A},$$

$$\vec{j} = \epsilon_0 \frac{\partial^2}{\partial t^2} \vec{A} - \epsilon_0 c^2 \nabla^2 \vec{A} + \epsilon_0 c^2 \nabla (\nabla \cdot \vec{A}) + \epsilon_0 \frac{\partial}{\partial t} \nabla \phi,$$

$$\rho = -\epsilon_0 \frac{\partial}{\partial t} \nabla \cdot \vec{A} - \epsilon_0 \nabla^2 \phi.$$

Proves controllability. Illustrates the interesting connection

controllability $\Leftrightarrow \exists$ potential!

Observability

Observability of the image representation

$$w = M \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) \ell$$

is defined as: ℓ can be deduced from w ,

i.e. $M \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right)$ should be injective.

Observability

Observability of the image representation

$$w = M \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) \ell$$

is defined as: ℓ can be deduced from w ,

i.e. $M \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right)$ should be injective.

Not all controllable systems admit an **observable** im. repr'n.
For $n = 1$, they do. For $n > 1$, exceptionally so.

The latent variable ℓ in an im. repr'n may be **'hidden'**.

Example: Maxwell's equations **do not** allow a potential representation with an **observable** potential.

Dissipative distributed systems

Notation

Multi-index notation:

$$\mathbf{x} = (x_1, \dots, x_n), \mathbf{k} = (k_1, \dots, k_n), \mathbf{l} = (l_1, \dots, l_n), \\ \boldsymbol{\xi} = (\xi_1, \dots, \xi_n), \boldsymbol{\zeta} = (\zeta_1, \dots, \zeta_n), \boldsymbol{\eta} = (\eta_1, \dots, \eta_n),$$

$$\frac{d}{dx} = \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right), \frac{d^{\mathbf{k}}}{dx^{\mathbf{k}}} = \left(\frac{\partial^{k_1}}{\partial x_1^{k_1}}, \dots, \frac{\partial^{k_n}}{\partial x_n^{k_n}} \right),$$

$$dx = dx_1 dx_2 \dots dx_n,$$

$$R \left(\frac{d}{dx} \right) w = 0 \quad \text{for} \quad R \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) w = 0,$$

$$w = M \left(\frac{d}{dx} \right) \ell \quad \text{for} \quad w = M \left(\frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right) \ell,$$

etc.

Notation

$$\nabla \cdot := \frac{\partial}{\partial x_1} + \cdots + \frac{\partial}{\partial x_n}.$$

For simplicity of notation, and for concreteness, we often take $n = 4$, independent variables, **t , time, and x, y, z , space.**

$$\nabla \cdot := \frac{\partial}{\partial x} + \frac{\partial}{\partial y} + \frac{\partial}{\partial z}, \quad \text{‘spatial flux’}$$

QDF's

The quadratic map acting on $w : \mathbb{R}^n \rightarrow \mathbb{R}^w$ and its derivatives, defined by

$$w \mapsto \sum_{k,l} \left(\frac{d^k}{dx^k} w \right)^\top \Phi_{k,l} \left(\frac{d^l}{dx^l} w \right)$$

is called *quadratic differential form* (QDF) on $\mathcal{C}^\infty(\mathbb{R}^n, \mathbb{R}^w)$.

$\Phi_{k,l} \in \mathbb{R}^{w \times w}$; **WLOG**: $\Phi_{k,l} = \Phi_{l,k}^\top$.

QDF's

The quadratic map acting on $w : \mathbb{R}^n \rightarrow \mathbb{R}^w$ and its derivatives, defined by

$$w \mapsto \sum_{k,l} \left(\frac{d^k}{dx^k} w \right)^\top \Phi_{k,l} \left(\frac{d^l}{dx^l} w \right)$$

is called *quadratic differential form* (QDF) on $\mathcal{C}^\infty(\mathbb{R}^n, \mathbb{R}^w)$.

$\Phi_{k,l} \in \mathbb{R}^{w \times w}$; **WLOG**: $\Phi_{k,l} = \Phi_{l,k}^\top$.

Introduce the $2n$ -variable polynomial matrix Φ

$$\Phi(\zeta, \eta) = \sum_{k,l} \Phi_{k,l} \zeta^k \eta^l.$$

Denote the QDF as Q_Φ . QDF's are parametrized by $\mathbb{R}[\zeta, \eta]$.

Dissipative distributed systems

We henceforth consider only **controllable linear differential systems** and **QDF's** for supply rates.

Dissipative distributed systems

We henceforth consider only **controllable linear differential systems** and **QDF's** for supply rates.

Definition: $\mathfrak{B} \in \mathfrak{L}_n^w$, controllable, is said to be

dissipative with respect to the supply rate Q_Φ

(a QDF) if

$$\int_{\mathbb{R}^n} Q_\Phi(w) dx \geq 0$$

for all $w \in \mathfrak{B}$ of compact support, i.e., for all $w \in \mathfrak{B} \cap \mathfrak{D}$.

$\mathfrak{D} := \mathcal{C}^\infty$ and ‘compact support’.

Dissipative distributed systems

Assume $n = 4$:

independent variables $x, y, z; t$: space and time.

Idea: $Q_{\Phi}(w)(x, y, z; t) \, dx dy dz \, dt$:

‘energy’ supplied to the system

in the space-cube $[x, x + dx] \times [y, y + dy] \times [z, z + dz]$
during the time-interval $[t, t + dt]$.

Dissipativity : \Leftrightarrow

$$\int_{\mathbb{R}} \left[\int_{\mathbb{R}^3} Q_{\Phi}(w)(x, y, z, t) \, dx dy dz \right] dt \geq 0 \quad \forall w \in \mathfrak{B} \cap \mathfrak{D}.$$

A dissipative system **absorbs** net energy.

Example: EM fields

Maxwell's eq'ns define a **dissipative** (in fact, a **conservative**) system w.r.t. the QDF $-\vec{E} \cdot \vec{j}$

Indeed, if \vec{E}, \vec{j} are of compact support and satisfy

$$\epsilon_0 \frac{\partial}{\partial t} \nabla \cdot \vec{E} + \nabla \cdot \vec{j} = 0,$$

$$\epsilon_0 \frac{\partial^2}{\partial t^2} \vec{E} + \epsilon_0 c^2 \nabla \times \nabla \times \vec{E} + \frac{\partial}{\partial t} \vec{j} = 0,$$

then

$$\int_{\mathbb{R}} \left[\int_{\mathbb{R}^3} \left(-\vec{E} \cdot \vec{j} \right) dx dy dz \right] dt = 0.$$

The storage and the flux

Local dissipation law

Dissipativity : \Leftrightarrow

$$\int_{\mathbb{R}} \left[\int_{\mathbb{R}^3} Q_{\Phi}(w) \, dx dy dz \right] dt \geq 0 \quad \text{for all } w \in \mathfrak{B} \cap \mathfrak{D}.$$

Local dissipation law

Dissipativity : \Leftrightarrow

$$\int_{\mathbb{R}} \left[\int_{\mathbb{R}^3} Q_{\Phi}(w) \, dx dy dz \right] dt \geq 0 \quad \text{for all } w \in \mathfrak{B} \cap \mathfrak{D}.$$


Can this be reinterpreted as:

As the system evolves, **some of the energy supplied is locally stored, some locally dissipated, and some redistributed over space?**

Local dissipation law

!! Invent **storage and flux**, locally defined in time and space, such that in every spatial domain there holds:

$$\frac{d}{dt} \text{Storage} + \text{Spatial flux} \leq \text{Supply.}$$

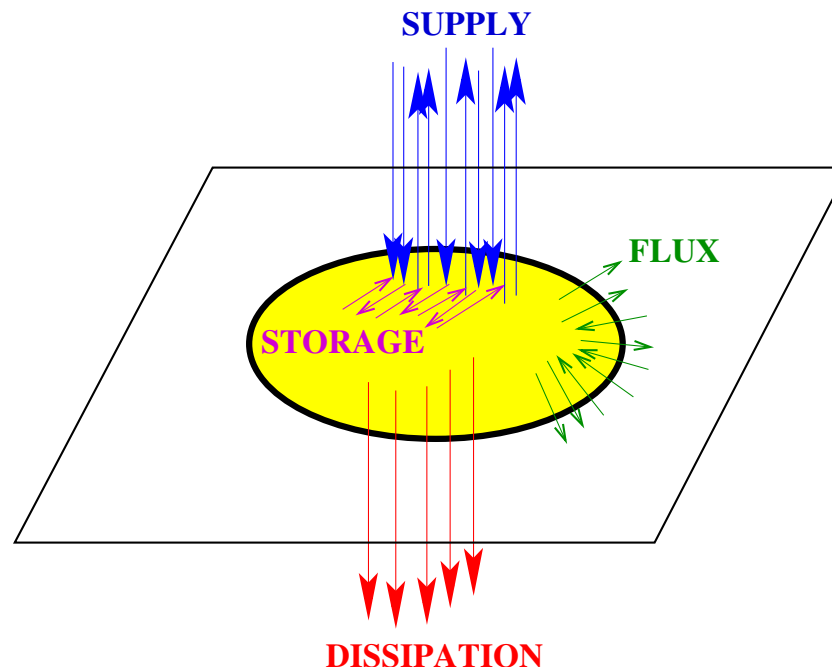

Supply = partly stored + partly radiated + partly dissipated.

MAIN RESULT (stated for $n = 4$)

Thm: $n = 4 : x, y, z; t : \text{space/time}; \mathfrak{B} \in \mathfrak{L}_4^w$, controllable.

Then $\int_{\mathbb{R}} \left[\int_{\mathbb{R}^3} Q_{\Phi}(w) dx dy dz \right] dt \geq 0$ for all $w \in \mathfrak{B} \cap \mathfrak{D}$



MAIN RESULT (stated for $n = 4$)

Thm: $n = 4 : x, y, z; t : \text{space/time}; \mathfrak{B} \in \mathfrak{L}_4^w$, controllable.

Then $\int_{\mathbb{R}} \left[\int_{\mathbb{R}^3} Q_{\Phi}(w) dx dy dz \right] dt \geq 0$ for all $w \in \mathfrak{B} \cap \mathfrak{D}$



\exists an im. repr. $w = M \left(\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z}, \frac{\partial}{\partial t} \right) \ell$ of \mathfrak{B} ,

MAIN RESULT (stated for $n = 4$)

Thm: $n = 4 : x, y, z; t$: space/time; $\mathfrak{B} \in \mathfrak{L}_4^w$, controllable.

Then $\int_{\mathbb{R}} \left[\int_{\mathbb{R}^3} Q_{\Phi}(w) \, dx dy dz \right] dt \geq 0$ for all $w \in \mathfrak{B} \cap \mathfrak{D}$



\exists an im. repr. $w = M \left(\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z}, \frac{\partial}{\partial t} \right) \ell$ of \mathfrak{B} , and
QDF's S , the *storage*, and F_x, F_y, F_z , the *flux*,

MAIN RESULT (stated for $n = 4$)

Thm: $n = 4 : x, y, z; t$: space/time; $\mathfrak{B} \in \mathfrak{L}_4^w$, controllable.

Then $\int_{\mathbb{R}} \left[\int_{\mathbb{R}^3} Q_{\Phi}(w) \, dx dy dz \right] dt \geq 0$ for all $w \in \mathfrak{B} \cap \mathfrak{D}$



\exists an im. repr. $w = M \left(\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z}, \frac{\partial}{\partial t} \right) \ell$ of \mathfrak{B} , and QDF's S , the *storage*, and F_x, F_y, F_z , the *flux*, such that the *local dissipation law*

$$\frac{\partial}{\partial t} S(\ell) + \frac{\partial}{\partial x} F_x(\ell) + \frac{\partial}{\partial y} F_y(\ell) + \frac{\partial}{\partial z} F_z(\ell) \leq Q_{\Phi}(w)$$

holds for all (w, ℓ) that satisfy $w = M \left(\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z}, \frac{\partial}{\partial t} \right) \ell$.

Hidden variables

The local law involves
possibly unobservable, - i.e., **hidden!**
latent variables (the *ℓ*'s).

This gives physical notions as stored energy, entropy, etc., an enigmatic physical flavor.

Energy stored in EM fields

Maxwell's equations are dissipative (in fact, conservative) with respect to $-\vec{E} \cdot \vec{j}$, the rate of energy supplied.

Energy stored in EM fields

Maxwell's equations are dissipative (in fact, conservative) with respect to $-\vec{E} \cdot \vec{j}$, the rate of energy supplied.

Introduce the *stored energy density*, S , and the *energy flux density (the Poynting vector)*, \vec{F} ,

$$S(\vec{E}, \vec{B}) := \frac{\epsilon_0}{2} \vec{E} \cdot \vec{E} + \frac{\epsilon_0 c^2}{2} \vec{B} \cdot \vec{B},$$

$$\vec{F}(\vec{E}, \vec{B}) := \epsilon_0 c^2 \vec{E} \times \vec{B}.$$

Local conservation law for Maxwell's equations:

$$\frac{\partial}{\partial t} S(\vec{E}, \vec{B}) + \nabla \cdot \vec{F}(\vec{E}, \vec{B}) = -\vec{E} \cdot \vec{j}.$$

Involves \vec{B} , unobservable from \vec{E} and \vec{j} .

The proof

Outline of the proof

Using **controllability** and **image representations**, we may assume, WLOG: $\mathfrak{B} = \mathcal{C}^\infty(\mathbb{R}^n, \mathbb{R}^w)$

To be shown

Global dissipation : \Leftrightarrow

$$\int_{\mathbb{R}^n} Q_\Phi(w) \geq 0 \text{ for all } w \in \mathfrak{D}$$

\Updownarrow

$$\exists \Psi : \quad \nabla \cdot Q_\Psi(w) \leq Q_\Phi(w) \text{ for all } w \in \mathcal{C}^\infty$$

\Leftrightarrow : **Local dissipation**

$$\int_{\mathbb{R}^n} Q_{\Phi}(w) \geq 0 \text{ for all } w \in \mathfrak{D}$$

\Leftrightarrow (Parseval)

$$\Phi(-i\omega, i\omega) \geq 0 \text{ for all } \omega \in \mathbb{R}^n$$

$$\int_{\mathbb{R}^n} Q_{\Phi}(w) \geq 0 \text{ for all } w \in \mathfrak{D}$$

\Leftrightarrow (Parseval)

$$\Phi(-i\omega, i\omega) \geq 0 \text{ for all } \omega \in \mathbb{R}^n$$

\Leftrightarrow

(Factorization equation)

$$\exists D : \quad \Phi(-\xi, \xi) = D^{\top}(-\xi) D(\xi)$$

$$\int_{\mathbb{R}^n} Q_{\Phi}(w) \geq 0 \text{ for all } w \in \mathfrak{D}$$

\Leftrightarrow (Parseval)

$$\Phi(-i\omega, i\omega) \geq 0 \text{ for all } \omega \in \mathbb{R}^n$$

\Leftrightarrow

(Factorization equation)

$$\exists D : \quad \Phi(-\xi, \xi) = D^{\top}(-\xi) D(\xi)$$

\Leftrightarrow (easy)

$$\exists \Psi : \quad (\zeta + \eta)^{\top} \Psi(\zeta, \eta) = \Phi(\zeta, \eta) - D^{\top}(\zeta) D(\eta)$$

$$\int_{\mathbb{R}^n} Q_{\Phi}(w) \geq 0 \text{ for all } w \in \mathfrak{D}$$

\Leftrightarrow (Parseval)

$$\Phi(-i\omega, i\omega) \geq 0 \text{ for all } \omega \in \mathbb{R}^n$$

\Leftrightarrow

(Factorization equation)

$$\exists D : \quad \Phi(-\xi, \xi) = D^{\top}(-\xi) D(\xi)$$

\Leftrightarrow (easy)

$$\exists \Psi : \quad (\zeta + \eta)^{\top} \Psi(\zeta, \eta) = \Phi(\zeta, \eta) - D^{\top}(\zeta) D(\eta)$$

\Leftrightarrow (clearly)

$$\exists \Psi : \quad \nabla \cdot Q_{\Psi}(w) \leq Q_{\Phi}(w) \text{ for all } w \in \mathfrak{C}^{\infty}$$

Outline of the proof

Assuming factorizability, we indeed obtain:

Global dissipation : \Leftrightarrow

$$\int_{\mathbb{R}^n} Q_{\Phi}(w) \geq 0 \text{ for all } w \in \mathcal{D}$$



$$\exists \Psi : \quad \nabla \cdot Q_{\Psi}(w) \leq Q_{\Phi}(w) \text{ for all } w \in \mathcal{C}^{\infty}$$

\Leftrightarrow : **Local dissipation**

Outline of the proof

Assuming factorizability, we indeed obtain:

Global dissipation : \Leftrightarrow

$$\int_{\mathbb{R}^n} Q_{\Phi}(w) \geq 0 \text{ for all } w \in \mathcal{D}$$



$$\exists \Psi : \quad \nabla \cdot Q_{\Psi}(w) \leq Q_{\Phi}(w) \text{ for all } w \in \mathcal{C}^{\infty}$$

\Leftrightarrow : **Local dissipation**

However, ... this argument is valid only for $n = 1$...

The factorization equation (FE)

The factorization equation

Consider

$$X^T(-\xi) X(\xi) = Y(\xi) \quad (\text{FE})$$

with $Y \in \mathbb{R}^{\bullet \times \bullet}[\xi]$ given, and X the unknown. *Solvable??*

The factorization equation

Consider

$$X^T(-\xi) X(\xi) = Y(\xi) \quad (\text{FE})$$

with $Y \in \mathbb{R}^{\bullet \times \bullet}[\xi]$ given, and X the unknown. Solvable??

\cong

$$X^T(\xi) X(\xi) = Y(\xi)$$

with $Y \in \mathbb{R}^{\bullet \times \bullet}[\xi]$ given, and X the unknown.

Under what conditions on Y does there exist a solution X ?

The factorization equation

Consider

$$X^T(-\xi) X(\xi) = Y(\xi) \quad (\text{FE})$$

with $Y \in \mathbb{R}^{\bullet \times \bullet}[\xi]$ given, and X the unknown. Solvable??

\cong

$$X^T(\xi) X(\xi) = Y(\xi)$$

with $Y \in \mathbb{R}^{\bullet \times \bullet}[\xi]$ given, and X the unknown.

Under what conditions on Y does there exist a solution X ?

Scalar case: write the real polynomial Y as a sum of squares

$$Y = x_1^2 + x_2^2 + \cdots + x_k^2.$$

$$X^T(\xi) X(\xi) = Y(\xi) \quad (\text{FE})$$

Y is a given polynomial matrix; X is the unknown.

For $n = 1$ and $Y \in \mathbb{R}[\xi]$, solvable (with $X \in \mathbb{R}^2[\xi]$) iff

$$Y(\alpha) \geq 0 \quad \text{for all } \alpha \in \mathbb{R}.$$

$$X^T(\xi) X(\xi) = Y(\xi) \quad (\text{FE})$$

Y is a given polynomial matrix; X is the unknown.

For $n = 1$ and $Y \in \mathbb{R}[\xi]$, solvable (with $X \in \mathbb{R}^2[\xi]$) iff

$$Y(\alpha) \geq 0 \quad \text{for all } \alpha \in \mathbb{R}.$$

For $n = 1$ and $Y \in \mathbb{R}^{\bullet \times \bullet}[\xi]$, it is well-known (but non-trivial) that (FE) is solvable (with $X \in \mathbb{R}^{\bullet \times \bullet}[\xi]$!) iff

$$Y(\alpha) = Y^T(\alpha) \geq 0 \quad \text{for all } \alpha \in \mathbb{R}.$$

$$X^T(\xi) X(\xi) = Y(\xi) \quad (\text{FE})$$

Y is a given polynomial matrix; X is the unknown.

For $n = 1$ and $Y \in \mathbb{R}^{\bullet \times \bullet}[\xi]$, it is well-known (but non-trivial) that (FE) is solvable (with $X \in \mathbb{R}^{\bullet \times \bullet}[\xi]$!) iff

$$Y(\alpha) = Y^T(\alpha) \geq 0 \quad \text{for all } \alpha \in \mathbb{R}.$$

For $n > 1$ and under the symmetry and positivity condition

$$Y(\alpha) = Y^T(\alpha) \geq 0 \quad \text{for all } \alpha \in \mathbb{R}^n,$$

this equation **can nevertheless** in general **not** be solved over the **polynomial matrices**, for $X \in \mathbb{R}^{\bullet \times \bullet}[\xi]$,

$$X^T(\xi) X(\xi) = Y(\xi) \quad (\text{FE})$$

Y is a given polynomial matrix; X is the unknown.

For $n = 1$ and $Y \in \mathbb{R}^{\bullet \times \bullet}[\xi]$, it is well-known (but non-trivial) that (FE) is solvable (with $X \in \mathbb{R}^{\bullet \times \bullet}[\xi]$!) iff

$$Y(\alpha) = Y^T(\alpha) \geq 0 \quad \text{for all } \alpha \in \mathbb{R}.$$

For $n > 1$ and under the symmetry and positivity condition

$$Y(\alpha) = Y^T(\alpha) \geq 0 \quad \text{for all } \alpha \in \mathbb{R}^n,$$

this equation **can nevertheless** in general **not** be solved over the **polynomial matrices**, for $X \in \mathbb{R}^{\bullet \times \bullet}[\xi]$,

but **it can** be solved over the **matrices of rational functions**, i.e., for $X \in \mathbb{R}^{\bullet \times \bullet}(\xi)$.

Hilbert's 17-th

This factorizability is a consequence of **Hilbert's 17-th pbm!**



!! Solve $p = p_1^2 + p_2^2 + \cdots + p_k^2$, p given

Hilbert's 17-th

This factorizability is a consequence of **Hilbert's 17-th pbm!**



!! Solve $p = p_1^2 + p_2^2 + \cdots + p_k^2$, p given

A polynomial $p \in \mathbb{R}[\xi_1, \dots, \xi_n]$, with $p(\alpha_1, \dots, \alpha_n) \geq 0$ for all $(\alpha_1, \dots, \alpha_n) \in \mathbb{R}^n$ can in general **not** be expressed as a SOS of polynomials, with the p_i 's $\in \mathbb{R}[\xi_1, \dots, \xi_n]$.

Hilbert's 17-th

This factorizability is a consequence of **Hilbert's 17-th pbm!**



!! Solve $p = p_1^2 + p_2^2 + \cdots + p_k^2$, p given

A polynomial $p \in \mathbb{R}[\xi_1, \dots, \xi_n]$, with $p(\alpha_1, \dots, \alpha_n) \geq 0$ for all $(\alpha_1, \dots, \alpha_n) \in \mathbb{R}^n$ can in general **not** be expressed as a SOS of polynomials, with the p_i 's $\in \mathbb{R}[\xi_1, \dots, \xi_n]$.

But a rational function (and hence a polynomial)

$p \in \mathbb{R}(\xi_1, \dots, \xi_n)$, with $p(\alpha_1, \dots, \alpha_n) \geq 0$, for all $(\alpha_1, \dots, \alpha_n) \in \mathbb{R}^n$, **can** be expressed as a SOS of ($k = 2^n$) rational functions, with the p_i 's $\in \mathbb{R}(\xi_1, \dots, \xi_n)$.

Outline of the proof

\Rightarrow solvability of the factorization eq'n

$$\Phi(-i\omega, i\omega) \geq 0 \text{ for all } \omega \in \mathbb{R}^n$$



(Factorization equation)

$$\exists D : \Phi(-\xi, \xi) = D^T(-\xi) D(\xi)$$

over the rational functions, i.e., with D a matrix with elements in $\mathbb{R}(\xi_1, \dots, \xi_n)$.

Outline of the proof

⇒ solvability of the factorization eq'n

$$\Phi(-i\omega, i\omega) \geq 0 \text{ for all } \omega \in \mathbb{R}^n$$



(Factorization equation)

$$\exists D : \quad \Phi(-\xi, \xi) = D^\top(-\xi) D(\xi)$$

over the rational functions, i.e., with D a matrix with elements in $\mathbb{R}(\xi_1, \dots, \xi_n)$.

The need to introduce **rational functions** in this factorization equation and an **image representation** of \mathfrak{B} (to reduce the pbm to \mathcal{C}^∞) are the causes of the **unavoidable** presence of (possibly unobservable, i.e., **'hidden'**) latent variables in the local dissipation law.

Uniqueness

Uniqueness

Non-uniqueness of the storage function stems from 3 sources

Uniqueness

Non-uniqueness of the storage function stems from 3 sources

1. The non-uniqueness of the **latent variable** ℓ in various (non-observable) image representations of \mathfrak{B} .
2. of D in the factorization equation

$$\Phi(-\xi, \xi) = D^T(-\xi) D(\xi)$$

3. (in the case $n > 1$) of the solution Ψ of

$$(\zeta + \eta)^T \Psi(\zeta, \eta) = \Phi(\zeta, \eta) - D^T(\zeta) D(\eta)$$

Uniqueness

Non-uniqueness of the storage function stems from 3 sources

1. The non-uniqueness of the **latent variable** ℓ in various (non-observable) image representations of \mathfrak{B} .
2. of D in the factorization equation

$$\Phi(-\xi, \xi) = D^T(-\xi) D(\xi)$$

3. (in the case $n > 1$) of the solution Ψ of

$$(\zeta + \eta)^T \Psi(\zeta, \eta) = \Phi(\zeta, \eta) - D^T(\zeta) D(\eta)$$

For **conservative systems**, $\Phi(-\xi, \xi) = 0$, whence $D = 0$, but, when $n > 1$, the third source of non-uniqueness remains.

Uniqueness

The non-uniqueness is very real, even for EM fields.

Uniqueness

The non-uniqueness is very real, even for EM fields. Cfr.

The ambiguity of the field energy

... There are, in fact, an infinite number of different possibilities for u [the internal energy] and S [the flux] ... It is sometimes claimed that this problem can be resolved using the theory of gravitation ... as yet nobody has done such a delicate experiment ... So we will follow the rest of the world - besides, we believe that it [our choice] is probably perfectly right.

**The Feynman Lectures on Physics,
Volume II, page 27-6.**

SUMMARY

- **The theory of dissipative systems centers around the construction of the storage function**

SUMMARY

- The theory of dissipative systems centers around the construction of the storage function
- **global dissipation $\Leftrightarrow \exists$ local dissipation law**

SUMMARY

- The theory of dissipative systems centers around the construction of the storage function
- **global dissipation $\Leftrightarrow \exists$ local dissipation law**
- Involves **possibly hidden** latent variables
(e.g. \vec{B} in Maxwell's eq'ns)

SUMMARY

- The theory of dissipative systems centers around the construction of the storage function
- **global dissipation $\Leftrightarrow \exists$ local dissipation law**
- Involves **possibly hidden** latent variables
(e.g. \vec{B} in Maxwell's eq'ns)
- The proof \cong **Hilbert's 17-th problem**

SUMMARY

- The theory of dissipative systems centers around the construction of the storage function
- **global dissipation $\Leftrightarrow \exists$ local dissipation law**
- Involves **possibly hidden** latent variables
(e.g. \vec{B} in Maxwell's eq'ns)
- The proof \cong **Hilbert's 17-th problem**
- Neither **controllability** nor **observability** are good generic system theoretic assumptions for physical models

Thank you

Thank you

Thank you

Thank you

Thank you

Thank you

Thank you

Thank you